


10-18-04

10734144



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 202 048 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **G01N 27/407, G01N 27/419**

(21) Application number: **01125865.4**

(22) Date of filing: **30.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Hada, Satoshi
Kariya-city, Aichi-pref. 448-0029 (JP)
- Suzuki, Toshiyuki
Kariya-city, Aichi-pref. 448-0029 (JP)
- Niwa, Mitsunobu
Kariya-city, Aichi-pref. 448-0029 (JP)

(30) Priority: **31.10.2000 JP 2000333319**
05.07.2001 JP 2001204728

(71) Applicant: **Denso Corporation**
Kariya-city, Aichi-pref., 448-0029 (JP)

(74) Representative: **Böckelen, Rainer**
Tiedtke-Bühling-Kinne & Partner (GbR),
TBK-Patent
Bavariaring 4
80336 München (DE)

(72) Inventors:
• Kurokawa, Eiichi
Kariya-city, Aichi-pref. 448-0029 (JP)

(54) Gas concentration measuring apparatus compensating for error component of output signal

(57) A gas concentration measuring apparatus is provided which includes a gas concentration sensor consisting of a pump cell, a sensor cell, and a monitor cell. The pump cell works to determine the concentration of O₂. The sensor cell works to decompose an oxygen containing gas such as NO_x and provide an output indicative of the concentration of NO_x. The apparatus also

includes an applying voltage determining circuit which looks up a predetermined voltage-to-current relation to determine a target voltage to be applied to the pump cell as a function of the current produced by the pump cell so as to preclude the pump cell from decomposing the oxygen containing gas component, thereby minimizing an error in determining the concentration of oxygen containing gas as a function of the output of the sensor cell.

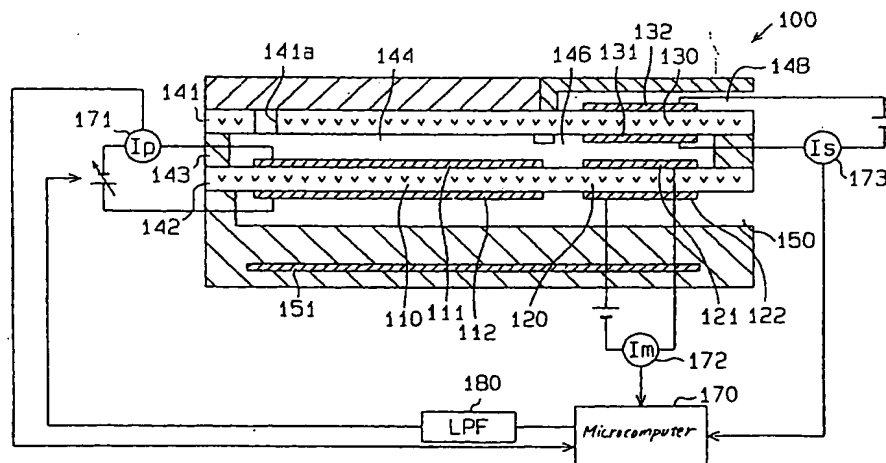


FIG. 1

Description

BACKGROUND OF THE INVENTION

1 Technical Field of the Invention

[0001] The present invention relates generally to a gas concentration sensor for measuring the concentration of gases which may be employed in an air-fuel ratio control system for automotive vehicles, and more particularly to a limiting current type gas concentration measuring apparatus equipped with a limiting current type gas sensor which is designed to compensate for an error in determining the concentration of a gas.

2 Background Art

[0002] Limiting current type gas concentration sensors are known which are used for measuring NOx contained in exhaust gasses of automotive engine. There is used one of such gas concentration sensors which includes a pump cell and a sensor cell. The pump cell works to pump oxygen (O₂) contained in gasses admitted into a gas chamber out of the sensor or to pump oxygen (O₂) of outside gasses into the gas chamber. The sensor cell works to measure the concentration of NOx contained in the gasses after passing through the pump cell. The pump cell and the sensor cell are designed to produce current signals indicative of the concentration of oxygen and NOx upon application of voltage thereto.

[0003] Another type of gas concentration sensor is known which includes a monitor cell in addition to the pump cell and the sensor cell. The monitor cell works to produce an electromotive force as a function of the concentration of oxygen within the gas chamber. A control system is also proposed which controls the voltage to be applied to the pump cell of such a three-cell gas concentration sensor under PID feedback (e.g., Academic Lecture Preliminary Report, Automotive Technical Meeting Corporation and SAE 970858). Specifically, this system is designed to determine the voltage to be applied to the pump cell based on a difference between an actual electromotive force produced by the monitor cell and a target one predetermined for keeping the concentration of oxygen at a lower level within the gas chamber.

[0004] The measurement of the concentration of exhaust gasses in the three-cell gas concentration sensor is achieved by introducing the exhaust gasses from the pump cell toward the monitor cell. Thus, when the concentration of exhaust gasses varies, a difference in concentration of the exhaust gasses between the pump cell and the monitor cell is resulted from a lag caused by the time required for the exhaust gasses to flow from the pump cell to the monitor cell. The time will, therefore, be consumed until the concentration of the exhaust gasses at the monitor cell agrees with that at the pump cell. This

problem will be objectionable in a gas concentration sensor in which an orifice is provided between the pump cell and the monitor cell. Accordingly, when the voltage to be applied to the pump cell is feedback controlled as a function of the electromotive force produced by the monitor cell, a shift in feedback control phase may result in oscillation.

[0005] For instance, when it is required to change the exhaust gasses to a lean side, so that a large quantity of oxygen flows into the gas chamber, it is difficult for the monitor cell to detect such changing, thereby resulting in insufficient quantity of oxygen pumped by the pump cell under the feedback control using an output of the monitor cell. A large quantity of oxygen, thus, remains undesirably within the gas chamber. Subsequently, when the lean condition of the exhaust gasses is detected based on the output of the monitor cell, it will cause an excess voltage to be applied to the pump cell to pump the residual oxygen out of the gas chamber thereinto, after which the monitor cell continues to provide an output indicative of the lean condition for a while. After it is found that too much oxygen has been pumped out of the gas chamber, the voltage applied to the pump cell is change rapidly to a lower level.

[0006] The above phenomenon is repeated, thereby leading to oscillation of a control system applying the voltage to the pump cell, so that a residual quantity of oxygen within the gas chamber changes greatly in a cycle. This may cause the quantity of oxygen contained in the exhaust gasses flowing to the sensor cell to increase or the pump cell to decompose NOx undesirably. When the former is taken place, the sensor cell decomposes the increased quantity of oxygen to increase an offset current contained in an output thereof. When the latter is taken place, it results in insufficient quantity of NOx contained in the exhaust gasses flowing to the sensor cell, thus producing an error in determining the concentration of NOx.

[0007] Additionally, when the response rate of each cell is changed with a change in temperature of the exhaust gasses or deterioration of the cell, a residual quantity of oxygen within the gas chamber also changes, thus resulting in a decrease in accuracy of determining the concentration of NOx. For instance, in a case where enriched exhaust gases are admitted into the gas chamber, and a rich gas component (e.g., HC) sticks to an electrode of the monitor cell, the monitor cell continues to produce an output indicative of the rich condition in error even after the exhaust gasses is changed to the lean side. This causes the voltage applied to the pump cell to be controlled so that oxygen (O₂) of outside gasses may be pumped into the gas chamber. Afterwards, when the rich gas component sticking to the electrode of the monitor cell reacts with the oxygen and peels, the monitor cell produces an output indicative of changing to the lean side, so that the voltage to be applied to the pump cell is so controlled as to pump the oxygen out of the gas chamber. At this time, the concentration of ox-

xygen within the gas chamber is increased extremely, thus resulting in application of an excess voltage to the pump cell. Similarly, in a case where the exhaust gases are switched from lean to rich, and a lean gas component (e.g., O₂) sticks to the electrode of the monitor cell, the monitor cell continues to produce an output indicative of the lean condition in error even after the exhaust gasses is changed to the rich side. This causes the voltage applied to the pump cell to be controlled so that oxygen (O₂) may be pumped out of the gas chamber. Specifically, an excess voltage is applied to the pump cell so as to decompose NOx as well as O₂.

[0008] The above event is repeated, thereby leading to oscillation of the control system applying the voltage to the pump cell, so that a residual quantity of oxygen (O₂) within the gas chamber changes greatly in a cycle. This results in decreased accuracy of determining the concentration of NOx.

SUMMARY OF THE INVENTION

[0009] It is therefore a principal object of the present invention to avoid the disadvantages of the prior art.

[0010] It is another object of the present invention to provide a gas concentration measuring apparatus designed to eliminate an error in determining the concentration of a specified gas component of measurement gases.

[0011] According to one aspect of the invention, there is provided a gas concentration measuring apparatus which may be employed with an automotive control system designed to control the quantity of fuel injected into an internal combustion gasoline engine as a function of an output of the gas concentration measuring apparatus under feedback (F/B) control to bring the air-fuel (A/F) ratio into agreement with a target value. The gas concentration measuring apparatus comprises: (a) a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump thereinto oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to determine a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof; (b) an applying voltage determining circuit looking up a predetermined voltage-to-current relation to determine a target voltage to be applied to the first cell as a function of the electric current produced by the first cell so as to preclude the first cell from decomposing the specified oxygen containing gas component; and (c) an applying voltage controlling circuit working to apply the target voltage determined by the applying voltage determining circuit to the first cell.

[0012] Unlike a conventional system in which an elec-

tromotive force produced by a monitor cell is brought into agreement with a target one under feedback control using PID techniques, the use of the voltage-to-current relation to determine the target voltage to be applied to the first cell in the gas concentration measuring apparatus of the invention eliminates the problem that the applying voltage controlling circuit oscillates due to a response delay of the monitor cell, thereby resulting in a great cyclic change in residual quantity of oxygen within the gas chamber.

[0013] In a conventional system in which the voltage to be applied to the first cell is determined using an output of the monitor cell under feedback control, the voltage applied to the first cell and outputs of the first cell, the second cell, and the monitor cell when the concentration of gasses changes to a lean side so that the concentration of oxygen increases are varied as shown in Fig. 22(b). Specifically, an undesirable time is consumed in detecting a change in concentration of gasses using the output of the monitor cell. The avoidance of oscillation arising from a difference in response speed between the first cell and the monitor cell requires decreasing a feedback gain, so that the voltage applied to the first cell changes slowly, which results in a lack of discharge of oxygen from the gas chamber. An excess current, thus, flows through the second cell. It is, in practice, difficult to determine the concentration of gasses until the outputs of the second cell and the monitor cell are in steady state.

[0014] In the gas concentration measuring apparatus of the invention, when the current produced by the first cell changes with a change in concentration of the gasses, the voltage applied to the first cell is, as can be seen from Fig. 22(a), adjusted to a target one immediately, thus preventing the concentration of oxygen from being increased undesirably within the gas chamber, so that the output of the monitor cell remains unchanged. The second cell, thus, produces the current indicative of the concentration of the specified oxygen containing gas quickly.

[0015] In the preferred mode of the invention, the gas chamber includes a first chamber to which the first cell is exposed, a second chamber to which the monitor cell is exposed, and a diffusion path communicating between the first and second chambers.

[0016] The predetermined voltage-to-current relation is listed in a map. The applying voltage determining circuit determines the target voltage to be applied to the first cell by look-up using the map.

[0017] An applying voltage correcting circuit may further be provided which works to correct the target voltage to be applied to the first cell as a function of a given residual oxygen variation factor of a variation in residual quantity of oxygen within the gas chamber after the first cell pumps the oxygen molecules. The residual oxygen variation factor is, for example, a change in concentration of the gasses, a change in activity of the first cell, or an inherent error of the sensor.

[0018] The applying voltage correcting circuit may correct the target voltage based on the output of the monitor cell.

[0019] The first cell is formed in a solid electrolyte element. A resistance measuring circuit may also be provided which works to measure a resistance of the solid electrolyte element. The applying voltage correcting circuit may correct the target voltage as a function of the resistance measured by the resistance measuring circuit.

[0020] The second cell outputs a current as a function of the concentration of the specified oxygen containing gas component. A second cell output correcting circuit may be provided which works to correct the current outputted from the second cell based on the output of the monitor cell.

[0021] A change rate determining circuit may be provided which works to determine a variable rate at which the target voltage applied to the first cell is to be changed. When the concentration of the gasses changes, so that the concentration of the oxygen molecules changes. The electric current produced by the first cell is, thus changed, thereby causing the target voltage to be applied to the first cell to be changed. In this case, the modification of the rate of application of the target voltage enables the oxygen molecules to be pump into or out of the gas chamber at an increased velocity.

[0022] The change rate determining circuit may increase the variable rate as a difference between an actual voltage applied to the first cell and the target voltage to be applied to the first cell increases.

[0023] The change rate determining circuit may determine the variable rate by setting a cycle in which the target voltage is changed. The change rate determining circuit may increase the cycle as a difference between an actual voltage applied to the first cell and the target voltage to be applied to the first cell is decreased. This results in an advance in convergence of the voltage applied to the first cell on the target one. The adjustment of the variable rate may eliminate the effect of a peak current produced when the voltage applied to the first cell is changed. Specifically, when the voltage applied to the first cell is changed, a peak current (i.e., tailing) is produced as an output of the first cell, but the adjustment of the variable rate enables the target voltage to be applied to the first cell to be changed after the peak current disappears. Fig. 23 shows an equivalent circuit of the gas concentration sensor. R_g indicates the resistance of particles of a solid electrolyte (zirconia) to oxygen ions. R_h and C_h indicate a grain boundary resistance and a grain boundary capacitance on a boundary face of the solid electrolyte, respectively. R_f and C_f indicate an electrode boundary face resistance and an electrode boundary face capacitance. When the voltage to be applied to the gas concentration sensor is, as shown in Fig. 24, changed, it will cause a peak current to be produced immediately due to charges stored by the capacitances C_h and C_f . The above adjustment of

the change rate enables the voltage applied to the first cell to be controlled without the influence of the capacitances of the gas concentration sensor.

[0024] A current measuring range is defined in which the electric current produced by the first cell is to be measured. The voltage-to-current relation is defined by a target applying voltage line representing the target applying voltage to be applied to the first cell in terms of the electric current produced by the first cell. The target applying voltage line includes a segment which changes with a change in electric current produced by the first cell at a first inclination substantially depending upon a resistance of the first cell within the current measuring range. Within an outside range defined outside the current measuring range, the target applying voltage line includes a segment which changes at a second inclination reverse in sign to the first inclination. This avoids undesirable generation of heat arising from an excess increase in output of the first cell.

[0025] A higher voltage may be applied to the first cell for a period of time following energization of the gas concentration sensor. When the gas concentration sensor is started, the gas chamber is filled with the air, so that an excess quantity of oxygen exist in the gas chamber. The application of the higher voltage causes the excess quantity of oxygen to be discharged out of the gas chamber quickly.

[0026] When the output of the monitor cell falls out of a specified range immediately after the gas concentration is energized, the applying voltage controlling circuit applies the higher voltage to the first cell.

[0027] According to the second aspect of the invention, there is provided a gas concentration measuring apparatus which comprises: (a) a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to determine a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof; (b) an applying voltage correcting circuit working to determine a target voltage to be applied to the first cell by looking up a predetermined voltage-to-current relation as a function of the electric current produced by the first cell, the applying voltage correcting circuit correcting one of the target voltage and the predetermined voltage-to-current relation as a function of the output of the monitor cell; and (c) an applying voltage controlling circuit working to control voltage applied to the first cell into agreement with the target voltage determined by the applying voltage correcting circuit. This enables a residual quantity of the oxygen within the gas chamber to be kept constant regardless of a change in activity of the first

cell, thus resulting in improved accuracy of determining the concentration of the specified oxygen containing gas.

[0028] In the preferred mode of the invention, the voltage-to-current relation is defined in a map by a target applying voltage line which represents the target applying voltage to be applied to the first cell in terms of the electric current produced by the first cell. The applying voltage correcting circuit corrects the voltage-to-current relation by changing an inclination of the target applying voltage line defined in the map as a function of the output of the monitor cell. For instance, as the output of the monitor cell increases, the inclination is preferably decreased, thereby increasing the target voltage to be applied to the first cell, so that a residual quantity of oxygen within the gas chamber is decreased.

[0029] The applying voltage correcting circuit may alternatively correct the voltage-to-current relation by changing an offset of the target applying voltage line in terms of the electric current produced by the first cell as a function of the output of the monitor cell. For instance, as the output of the monitor cell increases, the offset is preferably increased, thereby increasing the target voltage to be applied to the first cell, so that a residual quantity of oxygen within the gas chamber is decreased.

[0030] The applying voltage correcting circuit may correct the target voltage to be applied to the first cell so as to bring the output of the monitor cell into agreement with a target value required for keeping the concentration of oxygen molecules at a given level within the gas chamber.

[0031] The correction of the target voltage to be applied to the first cell is performed in a cycle longer than that in which the voltage applied to the first cell is controlled by the applying voltage controlling circuit in view of a change in response arising from deterioration or an inherent error of the sensor.

[0032] According to the third aspect of the invention, there is provided a gas concentration measuring apparatus which comprises: (a) a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules; a second cell working to produce an electric current for determining a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof; (b) an applying voltage determining circuit looking up a predetermined voltage-to-current relation to determine a target voltage to be applied to the first cell as a function of the electric current produced by the first cell so as to preclude the first cell from decomposing the specified oxygen containing gas component; and (c) a second cell output cor-

recting circuit working to correct the electric current outputted by the second cell as a function of the output of the monitor cell. This avoids an error in determining the concentration of the specified oxygen containing gas arising from a change in residual quantity of oxygen within the gas chamber.

[0033] In the preferred mode of the invention, the second cell output correcting circuit subtracts a current value equivalent to the output of the monitor cell representing the concentration of residual oxygen molecules from the electric current produced by the second cell.

[0034] The second cell output correcting circuit corrects the electric current produced by the second cell and the output of the monitor cell as a function of a difference in catalysis between the second cell and the monitor cell, after which the second cell output correcting circuit subtracts the current value equivalent to the output of the monitor cell representing the concentration of residual oxygen molecules from the electric current produced by the second cell.

[0035] The second cell and the monitor cell are disposed adjacent to each other and exposed to a second chamber formed downstream of the first cell.

[0036] According to the fourth aspect of the invention, there is provided a gas concentration measuring apparatus comprising: (a) a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to output an electric current for determining a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof; (b) an applying voltage determining circuit working to determine a target voltage to be applied to the first cell by looking up a predetermined voltage-to-current relation as a function of the electric current produced by the first cell; (c) a first correcting circuit working to correct one of the target voltage and the predetermined voltage-to-current relation as a function of the output of the monitor cell so as to preclude the first cell from decomposing the specified oxygen containing gas component; (d) an applying voltage controlling circuit working to control voltage applied to the first cell into agreement with the target voltage provided by the applying voltage correcting circuit; and (e) a second correcting circuit working to correct the electric current produced by the second cell as a function of the output of the monitor cell to determine the concentration of the specified oxygen containing gas component. This avoids an error in determining the concentration of the specified oxygen containing gas arising from a change in residual quantity of oxygen within the gas chamber.

[0037] In the preferred mode of the invention, the cor-

rection of the target voltage to be applied to the first cell is performed by the first correcting circuit in a cycle longer than that in which the voltage applied to the first cell is controlled by the applying voltage controlling circuit.

[0038] When the output of the monitor cell is brought into agreement with a target value or falls within a range around the target value under control of the target voltage applied to the first cell by the applying voltage controlling circuit, the second correcting circuit corrects the electric current produced by the second cell based on the output of the monitor cell.

[0039] According to the fifth aspect of the invention, there is provided a gas concentration measuring apparatus which comprises: (a) a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to determine a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof, the first cell being formed in a solid electrolyte element; (b) a resistance determining circuit working to determine a resistance of the solid electrolyte element; (c) an applying voltage determining circuit working to determine a target voltage to be applied to the first cell by looking up a predetermined voltage-to-current relation as a function of the electric current produced by the first cell; (d) an applying voltage correcting circuit correcting one of the target voltage and the predetermined voltage-to-current relation as a function of the resistance determined by the resistance determining circuit; and (e) an applying voltage controlling circuit working to control voltage applied to the first cell into agreement with the target voltage provided by the applying voltage correcting circuit. This avoid an error in determining the concentration of the specified oxygen containing gas arising from a change in residual quantity of oxygen within the gas chamber.

[0040] In the preferred mode of the invention, the voltage-to-current relation is defined in a map by a target applying voltage line which represents the target applying voltage to be applied to the first cell in terms of the electric current produced by the first cell. The applying voltage correcting circuit corrects the voltage-to-current relation by changing an inclination of the target applying voltage line defined in the map as a function of the resistance of the first cell.

[0041] The voltage-to-current relation is defined in a map by a target applying voltage line which represents the target applying voltage to be applied to the first cell in terms of the electric current produced by the first cell. The applying voltage correcting circuit corrects the voltage-to-current relation by changing an offset of the tar-

get applying voltage line in terms of the electric current produced by the first cell as a function of the resistance of the first cell.

BRIEF DESCRIPTION OF THE DRAWINGS

[0042] The present invention will be understood more fully from the detailed description given hereinbelow and from the accompanying drawings of the preferred embodiments of the invention, which, however, should not be taken to limit the invention to the specific embodiments but are for the purpose of explanation and understanding only.

[0043] In the drawings:

Fig. 1 is a block diagram which shows a gas concentration measuring apparatus according to the first embodiment of the invention;

Fig. 2 is a sectional view which shows a gas concentration sensor;

Fig. 3(a) shows an example of a map listing an applied voltage-to-output current relation of a pump cell;

Fig. 3(b) shows an example of a map listing an applied voltage-to-output current relation of a monitor cell;

Fig. 3(c) shows an example of a map listing an applied voltage-to-output current relation of a sensor cell;

Fig. 4 is an example of an applied voltage-to-output current map stored in a microcomputer for determining a target voltage to be applied to a pump cell;

Fig. 5(a) is a map showing a variation in applied voltage-to-output current relation of a pump cell with a variation in impedance of a pump cell which is used to correct the voltage to be applied to the pump cell as a function of the impedance of the pump cell;

Fig. 5(b) shows a variation in applied voltage-to-output current relation of a monitor cell with a variation in impedance of a pump cell;

Fig. 5(c) shows a variation in applied voltage-to-output current relation of a sensor cell with a variation in impedance of a pump cell;

Fig. 6 is a flowchart of a main program to control an operation of a gas concentration measuring apparatus according to the first embodiment of the invention;

Fig. 7 is a flowchart of a program to correct the voltage to be applied to a pump cell;

Fig. 8 is a flowchart of a program to determine a rate at which the voltage applied to a pump cell is to be changed;

Fig. 9 shows a relation between a rate at which the voltage applied to a pump cell is to be changed and a difference between a target voltage to be applied to the pump cell and an actual voltage being applied to the pump cell;

Fig. 10 shows a modification of the one shown in

Fig. 4;

Fig. 11 is a flowchart of a program to control an operation of a gas concentration measuring apparatus according to the second embodiment of the invention;

Fig. 12 is a flowchart of a program to correct the voltage to be applied to a pump cell according to the third embodiment of the invention;

Fig. 13 shows a map for correcting the voltage to be applied to a pump cell as a function of the impedance of the pump cell;

Fig. 14(a) is a map showing an applied voltage-to-output current relation of a pump cell which is used in correcting an output of a sensor cell as a function of an output current of a monitor cell according to the fourth embodiment of the invention;

Fig. 14(b) shows a variation in output current of a monitor cell with a variation in impedance of a pump cell;

Fig. 14(c) shows a variation in output current of a sensor cell with a variation in impedance of a pump cell;

Fig. 15 is a flowchart of a program to correct an output current of a sensor cell as a function of an output current of a monitor cell according to the fourth embodiment of the invention;

Fig. 16(a) is a map showing an applied voltage-to-output current relation of a pump cell which is used in correcting the voltage to be applied to a pump cell and an output of a sensor cell as a function of an output current of a monitor cell according to the fifth embodiment of the invention;

Fig. 16(b) shows a variation in output current of a monitor cell with a variation in impedance of a pump cell;

Fig. 16(c) shows a variation in output current of a sensor cell with a variation in impedance of a pump cell;

Fig. 17 is a flowchart of a program to correct the voltage to be applied to a pump cell and an output of a sensor cell as a function of an output current of a monitor cell according to the fifth embodiment of the invention;

Fig. 18 is a modification of a map for correcting the voltage to be applied to a pump cell as a function of the impedance of the pump cell according to the fifth embodiment of the invention;

Fig. 19 is a flowchart of a program to correct the voltage to be applied to a pump cell using the map of Fig. 18;

Fig. 20 is a circuit diagram which shows a modification of a low-pass filter of a gas concentration measuring apparatus;

Fig. 21 is a sectional view which shows a modification of a gas concentration measuring sensor;

Fig. 22(a) is a time chart showing changes in voltage to be applied to a pump cell and outputs of the pump cell, a monitor cell, and a sensor cell in a gas

concentration measuring apparatus of the invention;

Fig. 22(b) is a time chart showing changes in voltage to be applied to a pump cell and outputs of the pump cell, a monitor cell, and a sensor cell in a conventional gas concentration measuring apparatus;

Fig. 23 shows an equivalent circuit of a gas concentration sensor of the invention; and

Fig. 24 shows a peak current output when the voltage applied to the sensor of Fig. 23 is changed.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0044] Referring now to the drawings, wherein like numbers refer to like parts in several views, particularly to Fig. 1, there is shown a gas concentration measuring apparatus according to the first embodiment of the invention which may be used with an automotive control system designed to control the quantity of fuel injected into an internal combustion gasoline engine as a function of an output of the gas concentration measuring apparatus under feedback (F/B) control to bring the air-fuel (A/F) ratio into agreement with a target value. The gas concentration measuring apparatus uses a composite gas sensor capable of measuring concentrations of oxygen (O_2) and nitrogen oxide (NO_x) contained in exhaust gasses of the internal combustion engine simultaneously.

[0045] The gas concentration measuring apparatus, as shown in Fig. 1, generally includes a gas concentration sensor 100, a microcomputer or controller 170, current detectors 171, 172, and 173 (e.g., ammeters), and a low-pass filter 180.

[0046] The following discussion will refer to an example in which the gas concentration sensor 100 is installed in an exhaust pipe of an automotive internal combustion engine.

[0047] The gas concentration sensor 100 includes generally, as shown in Fig. 2, solid electrolyte plates 141 and 142 made of an oxygen ion-conducting material. The solid electrolyte plates 141 and 142 are laid to overlap each other at a given interval through a spacer 143 made of an insulating material such as alumina. The solid electrolyte plate 141 has formed therein a pinhole 141a through which exhaust gasses flowing around the gas concentration sensor 100 are admitted into a first chamber 144. The first chamber 144 communicates with a second chamber 146 through an orifice 145 working as a diffusion path. On the solid electrolyte plate 141, a porous diffusion layer 147 is formed.

[0048] The solid electrolyte plate 142 has formed therein a pump cell 110 and a monitor cell 120. The pump cell 110 works to dissociate or ionize and pump thereinto oxygen molecules (O_2) contained the exhaust gasses admitted into the first chamber 144 and discharge them for measuring the concentration of oxygen (O_2) contained in the exhaust gasses and also to disso-

ciate or ionize and pump oxygen molecules (O_2) within an air passage 150 into the first chamber 144 when the concentration of oxygen within the first chamber 144 is lower than a given level for keeping the concentration of oxygen within the first chamber 144 at the given level. The monitor cell 120 works to produce an electromotive force or current upon application of the voltage as a function the concentration of oxygen (O_2) within the second chamber 146. The pump cell 110 has a pair of upper and lower electrodes 111 and 112 disposed on opposed surfaces thereof. The upper electrode 111 is exposed to the first chamber 144 and inactive with respect to NOx, that is, hardly decomposes NOx. Similarly, the monitor cell 120 has a pair of upper and lower electrodes 121 and 122 disposed on opposed surfaces thereof. The upper electrode 121 is exposed to the second chamber 146 and inactive with respect to NOx, like the electrode 111. The pump cell 110 and the monitor cell 120 work to pump O_2 molecules contained in the exhaust gasses out of the first and second chambers 144 and 146 and discharge them to the air passage 150 through the electrodes 112 and 122.

[0049] A sensor cell 130 is formed in the solid electrolyte plate 144 opposite the monitor cell 120 and has a pair of upper and lower electrodes 131 and 132 formed on opposed surfaces thereof. The sensor cell 130 serves to measure the concentration of NOx contained in the exhaust gasses having passed through the pump cell 110 and discharge the oxygen produced when NOx is decomposed within the second chamber 146 to the air passage 148 through the electrode 132.

[0050] An insulating layer 149 is disposed on a lower surface, as viewed in Fig. 2, of the solid electrolyte plate 142 to define the air passage 150. The insulating layer 149 has embedded therein a heater 151 for heating the whole of the sensor 100 up to a given temperature.

[0051] In operation, when exhaust gasses containing O_2 , NOx, CO_2 , and H_2O enter the first chamber 144 through the porous diffusion layer 147 and the pinhole 141a and are passing through the pump cell 110, application of voltage to the pump cell 110 through the electrodes 111 and 112 causes the exhaust gasses to undergo dissociation, so that the oxygen (O_2) is pumped into or out of the first chamber 144 as a function of the concentration of oxygen (O_2) within the first chamber 144 so as to keep the concentration of oxygen within the first chamber 144 constant. Since the upper electrode 111 of the pump cell 110 is, as described above, made of a metal which hardly decomposes NOx, when the concentration of oxygen within the first chamber 144 is higher than a desired level, only O_2 molecules within the first chamber 144 are ionized by the pump cell 110 without decomposing NOx, which are, in turn, discharged to the air passage 150. This causes a current (will also referred to as a pump cell current below) to be produced in the pump cell 110 as a function of the oxygen content of the exhaust gasses. EPO 987 546 A2, assigned to the same assignee as that of this application, teaches

control of an operation of this type of gas sensor, disclosure of which is incorporated herein by reference.

[0052] The O_2 molecules in the exhaust gasses are usually not dissociated by the pump cell 110 completely, so that residual O_2 molecules flows into the second chamber 146 and reach the monitor cell 120. The application of given voltage to the monitor cell 120 through the electrodes 121 and 122 causes an output (will also be referred to as a monitor cell current below) to be produced as a function of the concentration of the residual oxygen. The application of given voltage to the sensor cell 130 through the electrodes 131 and 132 causes NOx molecules contained in the exhaust gasses to be decomposed or reduced, so that oxygen ions are produced and discharged to the air passage 148, thereby causing a current (also referred to as a sensor cell current or a NOx current below) to flow through the sensor 130 as a function of the concentration of NOx within the second chamber 146.

[0053] Figs. 3(a), 3(b), and 3(c) show examples of V-I relations between the voltages applied to the pump cell 110, the monitor cell 120, and the sensor cell 130 and outputs thereof: the pump cell current, the monitor cell current, and the sensor cell current, respectively. Note that Figs. 3(a) to 3(c) illustrate sensor output characteristics when the concentration of O_2 and NOx are constant.

[0054] The pump cell 110 works to produce a limiting current as a function of the concentration of oxygen (O_2) within the first chamber 144. A straight segment of a curve, as shown in Fig. 3(a), inclined slightly upward with respect to a V-axis (i.e., abscissa axis) indicates a limiting current measuring range in which the limiting current produced by the pump cell 110 is to be measured. The limiting current measuring range is shifted to the positive side of voltage applied to the pump cell 110 as the concentration of oxygen increases. This limiting current characteristics has a resistance-dependent range defined by a segment of the curve extending upward at an inclination substantially depending upon an impedance R_{ip} of the pump cell 110 (i.e., the solid electrolyte plate 142).

[0055] The gas concentration measuring apparatus of this embodiment stores therein a V-I map such as the one of Fig. 3(a) and monitors the pump cell current I_p to determine the pump cell-applied voltage V_p to be applied to the pump cell 110 by look-up using the V-I map. The V-I map has a target applying voltage line $LX1$ defined by an inclination a and an offset b and is used in determining the pump cell-applied voltage V_p along the line $LX1$. The upper pump cell electrode 111 of the pump cell 110 exposed to the first chamber 144 is, as described above, made of material which hardly decomposes NOx, so that NOx molecules in the exhaust gasses are hardly decomposed, but if the voltage applied to the pump cell 110 exceeds a certain upper limit, it will cause the NOx molecules to be decomposed, thereby producing an error in the pump cell current I_p (i.e., the

limiting current) outputted from the pump cell 110. In practice, the target applying voltage line *LX1* is so defined as to keep the concentration of oxygen (O_2) within the first chamber 144 at a lower level (near the stoichiometric). For instance, the target applying voltage line *LX1* is so defined that a small quantity of O_2 (e.g., several ppm to several tens ppm) remains in the first chamber 144.

[0056] The monitor cell 120, like the pump cell 110, works to produce a limiting current as a function of the concentration of oxygen (O_2) within the second chamber 146. The application of a given voltage *Vm1*, as shown in Fig. 3(b), to the monitor cell 120 causes a current *Im1* to be produced. When the concentration of oxygen within the second chamber 146 is also kept at a lower level, e.g., several ppm to several tens ppm, by the activity of the pump cell 110, the monitor cell 120 produces a monitor cell current *Im* of the order of 0.5 to 2 μA .

[0057] The sensor cell 130 works to produce a limiting current as a function of the concentration of NO_x . Specifically, the sensor cell 130 provides an output as a function of the concentration of NO_x contained in the gasses within the second chamber 146. The application of a given voltage *Vs1*, as shown in Fig. 3(c), to the sensor cell 130 causes a current *Is1* to be produced.

[0058] Returning back to Fig. 1, the microcomputer 170 is implemented by a typical arithmetic logic unit consisting of a CPU, a memory, an A/D converter, a D/A converter, etc.

[0059] Power supply circuits are, as clearly shown in the drawing, provided one for each of the pump cell 110, the monitor cell 120, and the sensor cell 130. The power supply circuits include voltage sources for applying the voltages *Vp*, *Vm*, and *Vs* to the pump cell 110, the monitor cell 120, and the sensor cell 130 and the current detectors 171, 172, and 173, respectively. The current detector 171 measures the pump cell current *Ip* produced by the pump cell 110 and provides a signal indicative thereof to the microcomputer 170. The current detector 172 measures the monitor cell current *Im* produced by the monitor cell 120 and provides a signal indicative thereof to the microcomputer 170. The current detector 173 measures the sensor cell current *Is* produced by the sensor cell 130 and provides a signal indicative thereof to the microcomputer 170.

[0060] The microcomputer 170 receives the output from the current detector 171 of the pump cell 110 indicative of the pump cell current *Ip* and determines the concentration of oxygen (O_2) in the exhaust gasses and the pump cell-applied voltage *Vp* to be applied to the pump cell 110 using the target applying voltage line *LX1* in the map of Fig. 3(a). The pump cell-applied voltage *Vp* is selected so as not to decompose NO_x through the pump cell 110. Further, the microcomputer 170 corrects the pump cell-applied voltage characteristics using the monitor cell current *Im* measured by the current detector 172 and determines the concentration of NO_x using the

sensor cell current *Is* measured by the current detector 173.

[0061] The microcomputer 170 measures the impedance of the pump cell 110 using the sweep method. The measurement of the impedance is achieved by changing the pump cell-applied voltage *Vp* to either of positive and negative sides instantaneously to produce an ac voltage which is, in turn, blurred in the form of a sine wave through the low-pass filter 180 and applied to the pump cell 110. The frequency of the ac voltage is preferably higher than 10KHz. The time constant of the low-pass filter 180 is in the order of 5 μsec . The microcomputer 170 monitors changes in the voltage and the pump cell current *Ip* to calculate the impedance of the pump cell 110. The low-pass filter 180 may be implemented by a primary filter consisting of a resistor and capacitor.

[0062] The microcomputer 170 sets a current measuring range in which the pump cell current *Ip* is to be measured. The current measuring range is defined as an oxygen concentration measuring range in the *V-I* map for the pump cell 110 as shown in Fig. 4. In the illustrated example, the oxygen concentration measuring range is defined between *Ip* = -1.8mA and *Ip* = 2mA. The target applying voltage line *LX1* is so determined that the pump cell-applied voltage *Vp* is controlled variably at least within the oxygen concentration measuring range. The microcomputer 170 stores the target applying voltage line *LX1* in the memory as map data. Within ranges other than the oxygen concentration measuring range, it is unnecessary to change the pump cell-applied voltage *Vp*, and, thus, the target applying voltage line *LX1* has segments extending straight vertically.

[0063] The correction of the pump cell-applied voltage characteristics using the monitor cell current *Im* will be described below in detail with reference to Figs. 5(a), 5(b), and 5(c). Note that Figs. 5(a) to 5(c) show examples of the applied voltage characteristics or *V-I* relations between voltages applied to the pump cell 110, the monitor cell 120, and the sensor cell 130 and outputs thereof when the concentration of O_2 and NO_x are, like the Figs. 3(a) to 3(c), constant and that solid lines (1) denote the reference *V-I* curves in Figs. 3(a), 3(b), and 3(c), respectively.

[0064] When the impedance *Rip* of the pump cell 110 is increased with a drop in temperature of exhaust gasses or greater than a reference value due to an inherent error of the pump cell 110, it will cause the *V-I* relation, as expressed by the solid line (1) in Fig. 5(a), to be shifted to a broken line (2), thereby making it impossible to dissociate O_2 molecules sufficiently by application of the pump cell-applied voltage *Vp* determined by the target applying voltage line *LX1* to the pump cell 110. This phenomenon is attributed to the slightly upward inclination of the segment of the *V-I* curve within the limiting current measuring range. Specifically, as the *V-I* curve is inclined to the right like the broken line (2), an undissociated quantity of O_2 increases. This causes residual O_2 within the first and second chambers 144 and 146 to

increase, thereby resulting in, as shown in Fig. 5(b), a change in the V - I relation of the monitor cell 120 from the solid line (1) to a broken line (2) (i.e., a change in monitor cell current from I_{m1} to I_{m2}). Additionally, the quantity of O_2 to be dissociated by the sensor cell 130 together with NO_x also increases, thereby causing the V - I relation of the sensor cell 130, as shown in Fig. 5(c), to be changed from the solid line (1) to a broken line (2), which leads to an error in determining the concentration of NO_x ($= I_{s2} - I_{s1}$).

[0065] Conversely, when the impedance R_{ip} of the pump cell 110 is decreased with a rise in temperature of exhaust gasses or lower than the reference value due to an inherent error of the pump cell 110, it will cause the V - I relation, as expressed by the solid line (1) in Fig. 5(a), to be shifted to a two-dot chain line (3), thereby resulting in dissociation of a portion of NO_x molecules as well as all O_2 molecules within the first chamber 144 when the pump cell-applied voltage V_p determined by the target applying voltage line $LX1$ is applied to the pump cell 110. This causes the V - I relation of the monitor cell 120 to be changed from the solid line (1) to a two-dot chain line (3) (i.e., a change in monitor cell current from I_{m1} to I_{m3}). Additionally, since the portion of the NO_x molecules has been already dissociated by the pump cell 110, the V - I relation of the sensor cell 130, as shown in Fig. 5(c), to be changed from the solid line (1) to a two-dot chain line (3), which leads to an error in determining the concentration of NO_x ($= I_{s3} - I_{s1}$).

[0066] Specifically, a change in impedance R_{ip} of the pump cell 110 will cause the residual quantity of O_2 within the first and second chambers 144 and 146 to change, which results in an error in determining the concentration of NO_x . In order to avoid this problem, the gas concentration measuring apparatus of this embodiment determines a change in residual quantity of O_2 based on the monitor cell current I_m produced by the monitor cell 120 to correct the pump cell-applied voltage V_p to be applied to the pump cell 110.

[0067] When the impedance R_{ip} of the pump cell 110 is increased, resulting in an increase in residual quantity of O_2 , the quantity of O_2 the pump cell 110 dissociates needs to be increased. The microcomputer 170 detects such a condition from the monitor cell current I_{m2} and changes the target applying voltage line $LX1$ to $LX2$ in Fig. 5(a). The inclination of the line $LX2$ is smaller than that of the line $LX1$, so that the pump cell-applied voltage V_p is so corrected as to increase in level. This results in a decrease in residual quantity of O_2 within the first and second chambers 144 and 146 to a desired one, so that the monitor cell 120 and the sensor cell 130 will have the V - I relations, as indicated by the solid lines (1) in Figs. 5(b) and 5(c), respectively, thereby eliminating the error in determining the concentration of NO_x .

[0068] Alternatively, when the impedance R_{ip} of the pump cell 110 is decreased, so that the pump cell 110 dissociates or decomposes NO_x undesirably, the quantity of O_2 the pump cell 110 dissociates needs to be de-

creased. The microcomputer 170 detects such a condition from the monitor cell current I_{m3} and changes the target applying voltage line $LX1$ to $LX3$ in Fig. 5(a). The inclination of the line $LX3$ is greater than that of the line $LX1$, so that the pump cell-applied voltage V_p is so corrected as to decrease in level. This results in an increase in residual quantity of O_2 within the first and second chambers 144 and 146 to a desired one, so that the monitor cell 120 and the sensor cell 130 will have the V - I relations, as indicated by the solid lines (1) in Figs. 5(b) and 5(c), respectively, thereby eliminating the error in determining the concentration of NO_x .

[0069] Fig. 6 shows a flowchart of a program or logical steps performed by the microcomputer 170 to determine the pump cell-applied voltage V_p .

[0070] Upon turning on of the microcomputer 170, the routine enters the program and proceeds to step 100 wherein it is determined whether a preselected period of time T_a has elapsed after the concentrations of O_2 and NO_x are measured in a previous cycle or not. The time T_a is, for example, 4msec. that is equivalent to one cycle of measurement of the concentrations of O_2 and NO_x .

[0071] If a YES answer is obtained in step 100, then the routine proceeds to step 110 wherein the monitor cell current I_m is monitored to correct the pump cell-applied voltage V_p to be applied to the pump cell 110 by shifting the target applying voltage line $LX1$ as described above. This correction will be discussed later in detail with reference to Fig. 7.

[0072] The routine proceeds to step 120 wherein the pump cell current I_p is read out of the current detector 171. The routine proceeds to step 130 wherein the pump cell-applied voltage V_p is determined as a function of the pump cell current I_p using the target applying voltage line $LX1$ corrected in step 110.

[0073] The routine proceeds to step 140 wherein the rate at which the pump cell-applied voltage V_p is to be changed is determined. This determination will be described later in detail with reference to Fig. 8.

[0074] The routine proceeds to step 150 wherein the pump cell-applied voltage V_p determined in step 130 is outputted to the pump cell 110 at the rate set in step 140. The routine proceeds to step 160 wherein after the pump cell current I_p is in a steady state following application of the pump cell-applied voltage V_p , the concentration of oxygen (O_2) contained in the exhaust gasses (or an air-fuel ratio) is determined as a function of the pump cell current I_p . The concentration of NO_x contained in the exhaust gasses is also determined as a function of the sensor cell current I_s . Note that the microcomputer 170 outputs the sensor cell-applied voltage V_s of a constant level to the sensor cell 130 at all times.

[0075] The routine proceeds to step 170 wherein it is determined whether a preselected period of time T_b has elapsed after previous determination of the impedance R_{ip} of the pump cell 110 or not. The time T_b is equivalent

to one cycle of measurement of the impedance R_{ip} and selected, for example, from 128msec. and 2sec. depending upon operating conditions of the engine. If a NO answer is obtained in step 170, then the routine terminates. Alternatively, if a YES answer is obtained, then the routine proceeds to step 180 wherein the impedance R_{ip} is determined and updated. The routine proceeds to step 190 wherein the current to be applied to the heater 151 is controlled in a manner, as will be described below in detail.

[0076] The measurement of the impedance R_{ip} of the pump cell 110 in step 180 is accomplished by changing the pump cell-applied voltage V_p to either of positive and negative sides of the monitor cell-applied voltage V_m instantaneously for several tens μ sec. to 100 μ sec. and monitoring a change in the pump cell-applied voltage V_p and a change in the pump cell current I_p to calculate the impedance R_{ip} of the pump cell 110 (R_{ip} = the change in the pump cell-applied voltage V_p / the change in the pump cell current I_p).

[0077] The control of the current to be applied to the heater 151 is achieved by adjusting the current so as to bring the impedance R_{ip} into agreement with a target one. For example, when the temperature of the gas concentration sensor 100 is lower than a given threshold value, and the impedance R_{ip} is higher, the heater 151 is energized at a controlled duty cycle of 100%. When the temperature of the gas concentration sensor 100 rises above the threshold value, the duty cycle is changed using the known PID control techniques, and the heater 151 is energized at the changed duty cycle.

[0078] Fig. 7 is a flowchart of a program performed in step 110 of Fig. 6 to correct the pump cell-applied voltage V_p .

[0079] After entering the program, the routine proceeds to step 111 wherein it is determined whether a correction time when the pump cell-applied voltage V_p should be corrected has been reached or not. For example, the correction time is set to an interval of 10 to several hundreds msec.

[0080] If a YES answer is obtained in step 111, then the routine proceeds to step 112 wherein the monitor cell current I_m is read out of the current detector 172. The routine proceeds to step 113 wherein a difference between the monitor cell current I_m derived in step 112 and a target monitor cell current I_{mtg} is determined as a current difference ΔI_m ($I_{mtg} - I_m$). The target monitor cell current I_{mtg} is set to, for example, 0.5 to 2 μ A required for keeping the concentration of oxygen within the second chamber 146 at a given low oxygen level (e.g., near the stoichiometric).

[0081] The routine proceeds to step 114 wherein a correction value ΔV_p of the pump cell-applied voltage V_p is determined as a function of the current difference ΔI_m . The correction value ΔV_p is an increment or a decrement of the pump cell-applied voltage V_p required for eliminating the current difference ΔI_m . Specifically, when an actual value of the monitor cell current I_m is

greater than the target monitor cell current I_{mtg} (i.e., $\Delta I_m < 0$), the correction value ΔV_p is so determined as to increment the pump cell-applied voltage V_p . Alternatively, when an actual value of the monitor cell current I_m is smaller than the target monitor cell current I_{mtg} (i.e., $\Delta I_m > 0$), the correction value ΔV_p is so determined as to decrement the pump cell-applied voltage V_p .

[0082] The routine proceeds to step 115 wherein a correction value $a1$ of the inclination of the target applying voltage line $LX1$ is determined based on the correction value ΔV_p derived in step 114. The correction value $a1$ is set substantially proportional to the correction value ΔV_p . The routine proceeds to step 116 wherein it is determined whether the correction value ΔV_p is positive or negative. If a YES answer is obtained meaning that the correction value ΔV_p is positive, then the routine proceeds to step 117 wherein the inclination of the target applying voltage line $LX1$ is decreased by the correction value $a1$. Alternatively, if a NO answer is obtained meaning that the correction value ΔV_p is negative, then the routine proceeds to step 118 wherein the inclination of the target applying voltage line $LX1$ is increased by the correction value $a1$. The routine proceeds to step 119 wherein the corrected inclination of the target applying voltage line $LX1$ is stored in the memory of the microcomputer 170.

[0083] Specifically, in step 117, the target applying voltage line $LX1$ of the $V-I$ map, for example, in Fig. 5 (a) is changed to $LX2$, thereby correcting the pump cell-applied voltage V_p in a direction in which the residual quantity of O_2 within the first chamber 144 is decreased. In step 118, the target applying voltage line $LX1$ of the $V-I$ map, for example, in Fig. 5(a) is changed to $LX3$, thereby correcting the pump cell-applied voltage V_p in a direction in which the residual quantity of O_2 within the first chamber 144 is increased. In other words, steps 117 and 118 work to bring the monitor cell current I_m into agreement with the target monitor cell current I_{mtg} (= I_{m1} in Fig. 5(b)), thereby keeping the concentration of oxygen constant in the first and second chambers 144 and 146.

[0084] After the pump cell-applied voltage characteristics or the $V-I$ map is corrected in the above manner, the microcomputer 170 determines the pump cell-applied voltage V_p as a function of the pump cell current I_p using the corrected $V-I$ map (i.e., the target voltage applying line $LX1$) in a cycle (e.g., 4msec.) shorter than a cycle of the correction of the $V-I$ map (e.g., 10 to several hundreds msec.).

[0085] Fig. 8 is a flowchart of a program performed in step 140 of Fig. 6 to determine the rate at which the pump cell-applied voltage V_p is to be changed.

[0086] After entering the program, the routine proceeds to step 141 wherein a difference between the pump cell-applied voltage V_p determined in step 130 of Fig. 6, that is, a target voltage to be applied to the pump cell 110 and an actual voltage being now applied to the pump cell 110 is determined as a voltage difference ΔV .

[0087] The routine proceeds to step 142 wherein an absolute value of the voltage difference ΔV is determined. Subsequent steps 143, 144, 145, 146, and 147 each determine the change rate of the pump cell-applied voltage V_p as a function of the voltage difference ΔV . Specifically, after determination of the absolute value of the voltage difference ΔV , step 142 also determines which of preselected ranges the absolute value of the voltage difference ΔV falls. As the absolute value of the voltage difference ΔV increases, the change rate of the pump cell-applied voltage V_p is set to a greater value. Additionally, as the voltage difference ΔV decreases, a cycle in which the pump cell-applied voltage V_p is changed is also prolonged.

[0088] The operations of steps 142 to 147 will be described below in more detail with reference to Fig. 8 and 9.

[0089] Step 142 determines which range the absolute value of the voltage difference ΔV falls. If the absolute value of the voltage difference ΔV falls within a range of less than 0.01, then the routine proceeds to step 143 wherein the change rate is set to 2mV/60msec. If the absolute value of the voltage difference ΔV falls within a range of 0.01 to 0.02, then the routine proceeds to step 144 wherein the change rate is set to 2mV/40msec. If the absolute value of the voltage difference ΔV falls within a range of 0.02 to 0.06, then the routine proceeds to step 145 wherein the change rate is set to 2mV/20msec. If the absolute value of the voltage difference ΔV falls within a range of 0.06 to 0.1, then the routine proceeds to step 146 wherein the change rate is set to 4mV/20msec. If the absolute value of the voltage difference ΔV falls within a range of 0.1 or more, then the routine proceeds to step 146 wherein the change rate is set to 8mV/20msec. Each value, as illustrated in Figs. 8 and 9, is merely an example and may be set to another. It is advisable that the change rate, as can be seen from Fig. 9, be increased as the absolute value of the voltage difference ΔV is increased.

[0090] As apparent from the above discussion, unlike conventional systems in which a monitor cell electromotive force is brought into agreement with a target one under feedback control, the gas concentration measuring apparatus of this embodiment is designed to control the pump cell-applied voltage V_p to be applied to the pump cell 110 using the V - I map stored in the memory, thereby avoiding undesirable oscillation of an applied voltage control circuit for the pump cell 110 which contributes to a great change in residual quantity of O_2 within the first and second chambers 144 and 146, thereby eliminating the error in determining the concentration of NO_x .

[0091] Additionally, when the pump cell current I_p changes, as shown in Fig. 22(a), during change in concentration of NO_x , the pump cell-applied voltage V_p is adjusted to a target one immediately following the change in pump cell current I_p . This avoids an undesirable increase in residual quantity of O_2 within the first

and second chambers 144 and 146, thereby avoiding an unwanted change in monitor cell current I_m , which enables the sensor cell 130 to produce the sensor cell current I_s indicative of the concentration of NO_x accurately at a quick response.

[0092] The response delay of the monitor cell 120 increases, especially in the structure in which the first chamber 144 communicates with the second chamber 146 through the orifice 145. Such a problem may, however, be alleviated by the gas concentration measuring apparatus of this embodiment.

[0093] A target voltage to be applied to the pump cell 110 is, as described above, corrected as a function of the monitor cell current I_m produced by the monitor cell 120, so that the residual quantity of O_2 within the first and second chambers 144 and 146 is optimized. Specifically, the monitor cell current I_m is converged on a target one, so that the residual quantity of O_2 within the first and second chambers 144 and 146 is kept at a desired level. Therefore, even if the activity of the pump cell 110 changes due to a change in temperature of exhaust gasses arising from rapid acceleration or deceleration of the engine, an inherent error, or deterioration of the pump cell 110, the gas concentration measuring apparatus of this embodiment is capable of measuring the concentration of NO_x with high accuracy.

[0094] The correction of the V - I map for the pump cell 110 is, as described above, executed in a cycle of, for example, 10 to several hundreds msec. longer than that (e.g., 4msec.) of control of the pump cell-applied voltage V_p . Specifically, such a correction is executed in a cycle determined by taking into consideration a change in response of the gas concentration sensor 100 due to deterioration or inherent error thereof, thereby minimizing undesirable oscillations of the control circuit during control of the applied voltage.

[0095] The change rate of the pump cell-applied voltage V_p is, as described above, controlled variably, thereby allowing the activity of the pump cell 110 to pump the residual O_2 out of the first chamber 144 or pump O_2 into the first chamber 144 to be enhanced, which results in improved NO_x measurement response and accuracy. Particularly, when the voltage difference ΔV between the pump cell-applied voltage V_p and an actual voltage being applied to the pump cell 110 is relatively small, the cycle in which the pump cell-applied voltage V_p is changed is prolonged, thereby eliminating the effect of a peak current during the change in pump cell-applied voltage V_p . Specifically, the change in V_p usually causes a peak (i.e., tailing) of the pump cell current I_p to be produced, but in this embodiment, the pump cell-applied voltage V_p is changed after the peak of the pump cell current I_p disappears, thereby resulting in improved reliability of control of the pump cell-applied voltage V_p .

[0096] As the V - I map for use in determining the pump cell-applied voltage V_p , one as shown in Fig. 10 may be employed. In this map, the target applying voltage line

LX1 is, like the above embodiment, defined within an oxygen concentration measuring range, and additional target applying voltage lines *L11* and *L12* are defined on lean and rich sides of the oxygen concentration measuring range, respectively. The target applying voltage line *L11* is a primary line extending between a point *A* that is a lean limit of the oxygen concentration measuring range and a point *B* defined on an ordinate axis indicating $V_p = 0$ (electromotive force on the lean side). The target applying voltage line *L12* is a primary line extending between a point *C* that is a rich limit of the oxygen concentration measuring range and a point *D* defined on a vertical line indicating $V_p = 0.9V$ (electromotive force on the rich side). Specifically, the target applying voltage line *LX1* has substantially the same inclination as that of a resistance-dependent portion of a *V-I* curve (i.e., a rising portion of the *V-I* curve defined by the impedance of the pump cell 110), while the target applying voltage lines *LX11* and *LX12* have inclinations reverse in sign to the target applying voltage line *LX1*.

[0097] The use of the *V-I* map of Fig. 10 prevents the pump cell current *I_p* from increasing undesirably outside the oxygen concentration measuring range by means of the target applying voltage lines *LX11* and *LX12*. Specifically, even if the sensor 100 is broken, the pump cell current *I_p* is kept around the oxygen concentration measuring range, thereby preventing an excess current from flowing through the pump cell 110. For example, on the lean side, the pump cell current *I_p* is limited at the point *E*, thereby undesirable heat from being produced by an excessive increase in the pump cell current *I_p*. This current limitation also serves to avoid an error in determining the impedance *R_{ip}* of the pump cell 110. For example, if the sensor 100 is broken in the absence of the current limitation, it will cause the current detected when the impedance *R_{ip}* is determined to exceed greatly out of the oxygen concentration measuring range, thus resulting in failure in calculating the impedance *R_{ip}*. The above current limitation avoids this problem.

[0098] The target applying voltage lines *LX11* and *LX12* may alternatively be primary lines extending in parallel to the abscissa axis of Fig. 10.

[0099] A gas concentration measuring apparatus according to the second embodiment will be described below.

[0100] When the gas concentration sensor 100 is actuated at the start of the engine, the first and second chambers 144 and 146 are filled with the air, so that a large quantity of oxygen exists (e.g., an oxygen concentration = 20.9%). This means that an excessive quantity of oxygen (O_2) contributing to an error in determining the concentration of NO_x is within the first and second chambers 144 and 146. In this case, when the voltage (e.g., when $A/F = 10$ to the air, 0.1 to 0.7V), as used in the first embodiment, is applied to the pump cell 110, 5 to 10 minutes are required to discharge the residual oxygen within the first and second chambers 144 and 146, thus resulting in a difficulty in determining the concen-

tration of NO_x quickly. In order to this problem, the gas concentration measuring apparatus of this embodiment is designed to apply a higher voltage (e.g., 0.8 to 1.2V) to the pump cell 110 for one minute to enhance the ability of the pump cell 110 to discharge the oxygen within the first and second chambers 144 and 146 to the air passage 150.

[0101] The above operation will be described below in detail with reference to Fig. 11. The program of Fig. 11 is performed by the microcomputer 170 instead of the one shown in Fig. 6. The same step numbers as employed in Fig. 6 will refer to the same operations.

[0102] Upon turning on of the microcomputer 170, the routine enters the program and proceeds to step 100 wherein it is determined whether a preselected period of time *T_a* has elapsed after the concentrations of O_2 and NO_x are measured in a previous cycle or not. If a YES answer is obtained, then the routine proceeds to step 201 wherein the elapsed time from start up of the engine is counted. The routine proceeds to step 202 wherein it is determined whether an initial control time, for example, one minute has passed or not. If a YES answer is obtained, then the routine proceeds to step 110 wherein the monitor cell current *I_m* is monitored to correct the pump cell-applied voltage *V_p* to be applied to the pump cell 110 in the same manner as in the first embodiment.

[0103] Alternatively, if a NO answer is obtained in step 202, then the routine proceeds to step 203 wherein it is determined whether the monitor cell current *I_m* indicates a normal value or not. This determination is made to determine whether the monitor cell current *I_m* lies within a normal range or not. For example, if $I_m \leq 4\mu A$ meaning that the monitor cell current *I_m* lies within the normal range, it is concluded that an excessive quantity of oxygen does not exist within the first and second chambers 144 and 146 even after the start up of the engine. For instance, such a condition is encountered when the engine is re-started immediately after the stop of the engine, and the routine proceeds to step 110.

[0104] Alternatively, if the monitor cell current *I_m* lies out of the normal range ($I_m > 4\mu A$), then the routine proceeds to step 204 wherein the pump cell-applied voltage *V_p* is set to a higher voltage (e.g., 0.8 to 1.2V) required to enhance the ability of the pump cell 110 to discharge the oxygen within the first and second chambers 144 and 146 to the air passage 150.

[0105] After the pump cell-applied voltage *V_p* is determined in step 110 or 204, the routine proceeds to step 150 wherein the pump cell-applied voltage *V_p* is outputted to the pump cell 110. The routine proceeds to step 160 wherein after the pump cell current *I_p* is in a steady state following application of the pump cell-applied voltage *V_p*, the concentration of oxygen contained in the exhaust gasses is determined as a function of the pump cell current *I_p*. The concentration of NO_x contained in the exhaust gasses is also determined as a function of the sensor cell current *I_s*.

[0106] Other arrangements are identical with those in the first embodiment, and explanation thereof in detail will be omitted here.

[0107] A gas concentration measuring apparatus according to the third embodiment will be described below.

[0108] A change in impedance R_{ip} of the pump cell 110 will cause the ability of the pump cell 110 to discharge the oxygen to the air passage 150 to be lowered even if the pump cell-applied voltage V_p is constant. In order to avoid this drawback, the gas concentration measuring apparatus of this embodiment is designed to correct the pump cell-applied voltage V_p to be applied to the pump cell 110 as a function of the impedance R_{ip} of the pump cell 110.

[0109] Instead of the correction of the pump cell-applied voltage V_p performed in step 110 of Fig. 6 (i.e., the program of Fig. 7), a program, as shown in Fig. 12, is executed by the microcomputer 170.

[0110] First, in step 301, it is determined whether a correction time when the pump cell-applied voltage V_p should be corrected has been reached or not. For example, the correction time is set to an interval of ten to several hundreds msec.

[0111] If a YES answer is obtained in step 301, then the routine proceeds to step 302 wherein the impedance R_{ip} of the pump cell 110 is determined in the same manner as described in the first embodiment. The routine proceeds to step 303 wherein the inclination of the target applying voltage line $LX1$ is corrected as a function of the impedance R_{ip} of the pump cell 110. The routine proceeds to step 304 wherein the corrected inclination of the target applying voltage line $LX1$ of the V - I map for the pump cell 110 is stored in the memory of the microcomputer 170.

[0112] The operation in step 303 will be described in detail with reference to Fig. 13.

[0113] If the impedance R_{ip} is smaller than a given threshold value, the target applying voltage line $LX1$ of the V - I map is changed to $LX2$, thereby correcting the pump cell-applied voltage V_p in a direction in which the residual quantity of O_2 within the first chamber 144 is decreased. Alternatively, if the impedance R_{ip} is greater than the given threshold value, the target applying voltage line $LX1$ is changed to $LX3$, thereby correcting the pump cell-applied voltage V_p in a direction in which the residual quantity of O_2 within the first chamber 144 is increased. This optimizes the residual quantity of O_2 within the first and second chambers 144 and 146, thereby resulting in improved accuracy of determining the concentration of NO_x .

[0114] A gas concentration measuring apparatus according to the fourth embodiment will be described below which is different from the one in the first embodiment only in that an output of the sensor cell 130 is corrected as a function of the monitor cell current I_m . Other arrangements are identical, and explanation thereof in detail will be omitted here.

[0115] Figs. 14(a), 14(b), and 14(c) show examples

of the applied voltage characteristics or V - I relations between voltages applied to the pump cell 110, the monitor cell 120, and the sensor cell 130 and outputs thereof when the concentration of O_2 and NO_x are, like the Figs. 3(a) to 3(c), constant and that solid lines (1) denote the reference V - I curves in Figs. 3(a), 3(b), and 3(c), respectively.

[0116] In Fig. 14(a), a target applying voltage line LXA is defined on a lower voltage side of the target applying voltage line $LX1$, as defined in Fig. 3(a). The pump cell-applied voltage V_p is determined on the target applying voltage line LXA . The shifting of the target applying voltage line $LX1$ to the lower voltage side means a slight increase in concentration of oxygen within the first and second chambers 144 and 146, thereby avoiding the decomposition of NO_x in the pump cell 110 even if the impedance R_{ip} of the pump cell 110 is increased undesirably due to, for example, a rise in temperature of exhaust gasses.

[0117] The first chamber 144 is, as described above, kept in concentration of oxygen at a constant level. The residual oxygen within the first chamber 144 flows into the second chamber 146. The sensor cell 130, thus, produces as the sensor cell current I_m the sum of a current produced by decomposition of NO_x and an offset current produced by the residual O_2 flowing into the second chamber 146. When the residual O_2 and the offset current are constant, it is possible to evaluate a relative concentration of NO_x , but when the offset current changes with a change in residual quantity of O_2 , it will result in an error in determining the concentration of NO_x . For instance, when the impedance R_{ip} is increased with a drop in temperature of exhaust gasses or greater than a reference value due to an inherent error of the gas concentration sensor 100, the V - I relation of the pump cell 110 changes from the solid line (1) to the broken line (2) in Fig. 14(a), which will cause the residual quantity of oxygen to increase within the first and second chambers 144 and 146. The increase in residual quantity of oxygen will cause the V - I relation of the monitor cell 120 to change, as shown in Fig. 14(b), from the solid line (1) to a broken line (2) (i.e., a change in monitor cell current from I_{m1} to I_{m2}). Additionally, the quantity of O_2 to be dissociated by the sensor cell 130 together with NO_x also increases, thereby causing the V - I relation of the sensor cell 130, as shown in Fig. 14(c), to be changed from the solid line (1) to a broken line (2), which leads to an error in determining the concentration of NO_x . The sensor cell current I_{s2} contains an offset current equivalent to the monitor cell current I_{m2} which contributes to the error in determining the concentration of NO_x . In order to avoid this drawback, the gas concentration measuring apparatus of this embodiment is designed to determine the residual quantity of oxygen using the monitor cell current I_m and correct the sensor cell current I_s .

[0118] Specifically, when the value of the monitor cell current I_m indicates I_{m1} or I_{m2} , it is subtracted from an

actual value I_{s1} or I_{s2} of the sensor cell current I_s . In either case, the sensor cell current I_s is corrected to a value I_{sA} which is produced only by decomposition of NOx without containing the offset current. Thus, when the concentration of NOx contained in exhaust gasses is constant, the sensor cell 130 continues to produce the sensor cell current I_s at a constant level, thereby eliminating the error in determining the concentration of NOx.

[0119] Conversely, when the impedance R_{ip} of the pump cell 110 is decreased with a rise in temperature of exhaust gasses or lower than the reference value due to an inherent error of the pump cell 110, it will cause the V - I relation, as expressed by the solid line (1) in Fig. 14(a), to be shifted to a two-dot chain line (3), thereby causing a small quantity of oxygen to remain in the first and second chambers 144 and 146. This causes the V - I relation of the monitor cell 120, as shown in Fig. 14(b), to be changed from the solid line (1) to a two-dot chain line (3) (i.e., a change in monitor cell current from I_{m1} to I_{m3}), thereby resulting in a decreased effect of the offset current on the sensor cell current I_s . The sensor cell current I_s may not be corrected.

[0120] If the catalysis of the electrodes 121 and 122 of the monitor cell 120 is identical with that of the electrodes 131 and 132 of the sensor cell 130, that is, the electrodes 121 and 122 are identical in size and material with the electrodes 131 and 132, it is possible to eliminate the offset current only by subtracting the monitor cell current I_m from the sensor cell current I_s . However, if the catalysis of the electrodes 121 and 122 of the monitor cell 120 is different from that of the electrodes 131 and 132 of the sensor cell 130, it is advisable that either of the monitor cell current I_m and the sensor cell current I_s be multiplied by a given coefficient equivalent to a difference in catalysis between the monitor cell 120 and the sensor cell 130 to bring the monitor cell current I_m and the sensor cell current I_s produced by the same quantity of oxygen into agreement with each other.

[0121] The above correction of the sensor cell current I_s is described in more detail with reference to a flow-chart of Fig. 15.

[0122] First, in step 401, it is determined whether a measurement time when the concentration of NOx should be measured has been reached or not. For example, the measurement time is set to an interval of 8msec.

[0123] If a YES answer is obtained in step 401, then the routine proceeds to step 402 wherein the monitor cell current I_m is read out of the current detector 172. The routine proceeds to step 403 wherein the sensor cell current I_s is read out of the current detector 173.

[0124] The routine proceeds to step 404 wherein the monitor cell current I_m is multiplied by a coefficient K determined by differences in size and material of the electrodes 121 and 122 of the monitor cell 120 and the electrodes 131 and 132 of the sensor cell 130 to produce a corrected monitor cell current $I_{m'}$. This eliminates the difference in catalysis between the monitor cell 120 and

the sensor cell 130. If the degree of catalysis of the electrodes 121 and 122 of the monitor cell 120 is identical with that of the electrodes 131 and 132 of the sensor cell 130, the coefficient K is set to one (1). The sensor cell current I_s may alternatively be multiplied by the coefficient K .

[0125] The routine proceeds to step 405 wherein the corrected monitor cell current $I_{m'}$ is subtracted from the sensor cell current I_s to determine a corrected sensor cell current I_{sB} . This eliminates an error in determining the concentration of NOx arising from inclusion of the offset in the sensor cell current I_s . In the example of Figs. 14(c), I_{sA} is determined as the corrected sensor cell current I_{sB} .

[0126] The above operations in steps 401 to 405 may be executed in step 160 of Fig. 6.

[0127] A gas concentration measuring apparatus according to the fifth embodiment of the invention will be described below which is designed to perform both the function of correcting the V - I relation defined in the map for the pump cell 110 based on the monitor cell current I_m and the function of correcting an output of the sensor cell 130 based on the monitor cell current I_m .

[0128] The gas concentration measuring apparatus works to monitor the monitor cell current I_m to determine the residual quantity of oxygen within the second chamber 146 and correct the pump cell-applied voltage V_p as a function of the residual quantity of oxygen, thereby keeping the concentration of oxygen constant within the first and second chambers 144 and 146. The unit of current produced by the pump cell 110 as a function of the concentration of oxygen is mA (milli ampere), while the unit of current produced by the sensor cell 130 produced as a function of the concentration of NOx is μ A (micro ampere). Specifically, the pump cell current I_p is greatly different in level from the sensor cell current I_s . It is, thus, difficult for the pump cell 110 to discharge the oxygen to the air passage 150 completely without decomposing the NOx in terms of control resolution. Discharging the oxygen to the air passage 150 completely may result in decomposition of a small quantity of NOx, which will cause a great error to be added to the sensor cell current I_s . The gas concentration measuring apparatus of this embodiment is, thus, designed to correct the pump cell-applied voltage V_p (i.e., the V - I map for the pump cell 110) to the extent that the pump cell 110 does not decompose NOx. This will cause a small quantity of oxygen to remain within the first and second chambers 144 and 146. The gas concentration measuring apparatus monitors the residual quantity of oxygen using the monitor cell current I_m produced by the monitor cell 120 to correct the sensor cell current I_s .

[0129] The above operations will be discussed in detail with reference to Figs. 16(a), 16(b), and 16(c).

[0130] Figs. 16(a), 16(b), and 16(c) show examples of the applied voltage characteristics or V - I relations between voltages applied to the pump cell 110, the monitor cell 120, and the sensor cell 130 and outputs thereof

when the concentration of O_2 and NO_x are, like the Figs. 3(a) to 3(c), constant and that solid lines (1) denote the reference V - I curves in Figs. 3(a), 3(b), and 3(c), respectively.

[0131] When the impedance R_{ip} of the pump cell 110 is kept at a target value, so that it is unnecessary to correct the target applying voltage line $LX1$ in the V - I map for the pump cell 110, that is, when the pump cell 110 has the V - I relation, as indicated by (1) in Fig. 16(a), the pump cell-applied voltage V_p which does not induce the decomposition of NO_x in the pump cell 110 is provided, thereby causing a small quantity of oxygen to flow into the second chamber 146. Thus, the monitor cell current I_m produced by the monitor cell 120 has a value I_{m1} , as indicated in Fig. 16(b), and the sensor cell current I_s produced by the sensor cell 130 has a value I_{s1} , as indicated in Fig. 16(c). The value I_{s1} contains an offset current component equivalent to the value I_{m1} of the monitor cell current I_m . The microcomputer 170, thus, subtracts the offset current component from the value I_{s1} of the sensor cell current I_s to derive a sensor current value I_{sC} not including the offset current component.

[0132] When the impedance R_{ip} is increased with a drop in temperature of exhaust gasses or greater than a reference value due to an inherent error of the gas concentration sensor 100, the V - I relation of the pump cell 110 changes from the solid line (1) to the broken line (2) in Fig. 16(a), the microcomputer 170 detects such a condition from the value I_{m2} of the monitor cell current I_m and changes the target applying voltage line $LX1$ to $LX2$ in Fig. 16(a), thereby keeping the concentration of oxygen constant within the first and second chambers 144 and 146. The monitor cell 120 and the sensor cell 130 will, thus, have the V - I relations, as indicated by the solid lines (1) in Figs. 16(b) and 16(c), respectively, thereby causing the sensor cell 130 to produce the current value I_{s1} in Fig. 16(c). The current value I_{s1} , as described above, contains the offset current component. The microcomputer 170, thus, subtracts the offset current component from the current value I_{s1} to derive the current value I_{sC} , thereby eliminating the error in determining the concentration of NO_x .

[0133] Alternatively, when the impedance R_{ip} of the pump cell 110 is decreased, the V - I relation of the pump cell 110 changes from the solid line (1) to the broken line (3) in Fig. 16(a). The microcomputer 170 detects such a condition from the monitor cell current I_{m3} and changes the target applying voltage line $LX1$ to $LX3$ in Fig. 16(a), thereby keeping the concentration of oxygen constant within the first and second chambers 144 and 146. The sensor cell 130 will, thus, have the V - I relation, as indicated by the solid line (1) in Fig. 16(c), thereby causing the sensor cell 130 to produce the current value I_{s1} in Fig. 16(c). The current value I_{s1} , as described above, contains the offset current component. The microcomputer 170, thus, subtracts the offset current component from the current value I_{s1} to derive the current value I_{sC} , thereby eliminating the error in determining the con-

centration of NO_x .

[0134] The above operations are achieved in the microcomputer 170 by executing the program of Fig. 7, as described already, and a program, as shown in Fig. 17. Specifically, the microcomputer 170 executes the program of Fig. 7 to correct the target applying voltage line $LX1$ in the map for the pump cell 110 and update the pump cell-applied voltage V_p as a function of the pump cell current I_p at a cycle of 4msec. The program of Fig. 17 is different from the one shown in Fig. 15 only in step 450. Specifically, after the monitor cell current I_m is read out of the current detector 172 in step 402, the routine proceeds to step 450 wherein it is determined whether the monitor cell current I_m has been converged on or fallen within a range around a target one or not. The pump cell-applied voltage V_p is corrected by the operation of Fig. 7 so as to bring the monitor cell current I_m into agreement with the target monitor cell current I_{mtg} which is set to, for example, 0.5 to 2 μA required for keeping the concentration of oxygen within the second chamber 146 at a given low oxygen level (e.g., near the stoichiometric). Therefore, if the monitor cell current I_m has been brought into agreement the target monitor cell current I_{mtg} , a YES answer is obtained in step 450, and the routine proceeds to step 403. Specifically, if the concentration of oxygen within the second chamber 146 is kept at a desired level, the routine proceeds to step 403 wherein the sensor cell current I_s is read out of the current detector 173. Alternatively, if a NO answer is obtained in step 450, then the routine returns back to step 401. The following steps 404 and 405 are identical with those in Fig. 7, and explanation thereof in detail will be omitted here.

[0135] Instead of the program of Fig. 7, a program of Fig. 12 may be executed. Specifically, the microcomputer 170 corrects the V - I relation of the pump cell 110 as a function of the impedance R_{ip} of the pump cell 110. This also enables the concentration of NO_x to be determined accurately.

[0136] The gas concentration measuring apparatus of the fifth embodiment is also capable of avoiding undesirable oscillation of an applied voltage control circuit for the pump cell 110 which contributes to a great change in residual quantity of O_2 within the first and second chambers 144 and 146, thus eliminating the error in determining the concentration of NO_x .

[0137] Further, the correction of the V - I map for the pump cell 110 is executed in a cycle of, for example, 10 to several hundreds msec., and the correction of the sensor cell current I_s is carried out in a cycle of, for example, 8msec. which are longer than that (e.g., 4msec.) of control of the pump cell-applied voltage V_p . Specifically, such corrections are executed in a cycle determined by taking into consideration a change in response of the gas concentration sensor 100 due to deterioration or inherent error thereof, thereby minimizing undesirable oscillations of the control circuit during control of the applied voltage.

[0138] In the above embodiment, the correction of the pump cell-applied voltage V_p is, as described in Figs. 5 (a) to 5(c), achieved by changing the inclination of the target applying voltage line $LX1$, however, it may alternatively be accomplished by changing the offset b , as shown in Fig. 3(a). Specifically, when the impedance R_{ip} is increased, for example, with a drop in temperature of exhaust gasses, the $V-I$ relation of the pump cell 110 changes, as clearly shown in Fig. 18, from the solid line (1) to the broken line (2), the microcomputer 170 detects such an event from the monitor cell current I_m and changes the target applying voltage line $LX1$ to $LX10$ in Fig. 18. Alternatively, when the impedance R_{ip} of the pump cell 110 is decreased, it will cause the $V-I$ relation of the pump cell 110 to change from the solid line (1) to the broken line (3) in Fig. 18. The microcomputer 170 detects such an event from the monitor cell current I_m and changes the target applying voltage line $LX1$ to $LX11$. This keeps the concentration of oxygen constant within the second chambers 146, thus resulting in improved accuracy in determining the concentration of NO_x .

[0139] The above operations will be described below in detail with reference to Fig. 19. Steps 111 to 114 are identical with those in Fig. 7.

[0140] After the correction value ΔVP of the pump cell-applied voltage V_p is determined as a function of the current difference ΔI_m in step 144, the routine proceeds to step 501 wherein it is determined whether the correction value ΔVP is smaller than or equal to 0V or not. If a NO answer is obtained ($\Delta VP > 0$), then the routine proceeds to step 502 wherein the offset b of the target applying voltage line $LX1$ is increased by the correction value ΔVP . Alternatively, if a YES answer is obtained in step 501 ($\Delta VP \leq 0$), then the routine proceeds to step 503 wherein the offset b of the target applying voltage line $LX1$ is decreased by the correction value ΔVP . After step 502 or 503, the routine proceeds to step 504 wherein the corrected offset b is stored in the memory of the microcomputer 170.

[0141] Specifically, step 502 changes the target applying voltage line $LX1$ to $LX10$ in Fig. 18, thereby correcting the pump cell-applied voltage V_p so as to decrease the residual quantity of oxygen in the first chamber 144. Step 503 changes the target applying voltage line $LX1$ to $LX11$ in Fig. 18, thereby correcting the pump cell-applied voltage V_p so as to increase the residual quantity of oxygen in the first chamber 144.

[0142] The above correction of the inclination of the target applying voltage line $LX1$ may alternatively be performed in the operation of Fig. 12 as a function of the impedance R_{ip} of the pump cell 110. In this case, the offset b is increased with an increase in impedance R_{ip} .

[0143] Instead of the correction of the target applying voltage line $LX1$, the pump cell-applied voltage V_p determined directly using the target applying voltage line $LX1$ may be corrected. For example, in place of steps 110 to 130 in Fig. 6, the pump cell-applied voltage V_p

may be corrected as a function of the monitor cell current I_m . Similar correction may be performed in the third embodiment in which the target applying voltage line $LX1$ is corrected as a function of the impedance R_{ip} of the pump cell 110.

[0144] Fig. 20 shows a modification of the low-pass filter 180 in which the time constant there of is changed between when the impedance R_{ip} of the pump cell 110 is detected and when the concentration of a gas is measured.

[0145] The low-pass filter 180 consists of resistors $R1$ and $R2$ ($R1 > R2$) and a switch SW . When it is required to determine the concentration of oxygen, the microcomputer 170 outputs an off signal to the switch SW to establish connection between the resistor $R1$ and the microcomputer 170, thereby increasing the time constant. When it is required to determine the impedance R_{ip} of the pump cell 110, the microcomputer 170 outputs an on signal to the switch SW to establish connection between the resistor $R2$ and the microcomputer 170, thereby decreasing the time constant. This enables the rate at which the pump cell-applied voltage V_p is applied to the pump cell 110 to be controlled variably.

[0146] The gas concentration measuring apparatus in each of the above described embodiments may be used with a gas concentration sensor 300 as shown in Fig. 21.

[0147] The gas concentration sensor 300 includes solid electrolyte bodies 301 and 302. The solid electrolyte body 301 has formed therein first and second pump cells 310 and 320. The solid electrolyte body 302 has formed therein a monitor cell 330 and a sensor cell 340. Between the solid electrolyte bodies 301 and 302, first and second chambers 303 and 304 which communicate with each other through an orifice 305 working as a diffusion path. The exhaust gasses are admitted into the first chamber 303 through a pinhole 306. Reference numbers 307 and 308 indicate air passages 307 and 308 are formed outside the solid electrolyte bodies 301 and 302. The reference number 309 denotes a heater.

[0148] The two pump cells 310 and 320 are provided for enhancing the pumping ability to pump the oxygen out of the first and second chambers 303 and 304 and the accuracy thereof.

[0149] The gas concentration measuring apparatus in each of the above described embodiments may also be used with a multi-cell gas concentration sensor having more than five cells.

[0150] A gas concentration sensor which is designed to decompose and discharge O_2 contained in gasses to be measured through a pump cell and decompose HC or CO contained in the gasses after the decomposition of O_2 through a sensor cell may be used in each of the above embodiments. Further, the gas concentration measuring apparatus in each of the above embodiments may also be used for measuring the concentration of gasses other than exhaust gasses of an automotive engine.

[0151] While the present invention has been dis-

closed in terms of the preferred embodiments in order to facilitate better understanding thereof, it should be appreciated that the invention can be embodied in various ways without departing from the principle of the invention. Therefore, the invention should be understood to include all possible embodiments and modifications to the shown embodiments which can be embodied without departing from the principle of the invention as set forth in the appended claims. For example, the monitor cell 120 may alternatively be implemented by an oxygen concentration cell designed to produce an electromotive force as a function of oxygen (O_2).

[0152] A gas concentration measuring apparatus is provided which includes a gas concentration sensor consisting of a pump cell, a sensor cell, and a monitor cell. The pump cell works to determine the concentration of O_2 . The sensor cell works to decompose an oxygen containing gas such as NO_x and provide an output indicative of the concentration of NO_x . The apparatus also includes an applying voltage determining circuit which looks up a predetermined voltage-to-current relation to determine a target voltage to be applied to the pump cell as a function of the current produced by the pump cell so as to preclude the pump cell from decomposing the oxygen containing gas component, thereby minimizing an error in determining the concentration of oxygen containing gas as a function of the output of the sensor cell.

Claims

1. A gas concentration measuring apparatus comprising:

a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to determine a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof;

an applying voltage determining circuit looking up a predetermined voltage-to-current relation to determine a target voltage to be applied to said first cell as a function of the electric current produced by said first cell so as to preclude said first cell from decomposing the specified oxygen containing gas component; and
an applying voltage controlling circuit working to apply the target voltage determined by said applying voltage determining circuit to said first

cell.

2. A gas concentration measuring apparatus as set forth in claim 1, wherein the gas chamber includes a first chamber to which said first cell is exposed, a second chamber to which said monitor cell is exposed, and a diffusion path communicating between the first and second chambers.
3. A gas concentration measuring apparatus as set forth in claim 1, wherein the predetermined voltage-to-current relation is listed in a map, and wherein the applying voltage determining circuit determines the target voltage to be applied to said first cell by look-up using the map.
4. A gas concentration measuring apparatus as set forth in claim 1, further comprising an applying voltage correcting circuit working to correct the target voltage to be applied to said first cell as a function of a given residual oxygen variation factor of a variation in residual quantity of oxygen remaining within the gas chamber after said first cell pumps the oxygen molecules.
5. A gas concentration measuring apparatus as set forth in claim 4, wherein said applying voltage correcting circuit corrects the target voltage based on the output of said monitor cell.
6. A gas concentration measuring apparatus as set forth in claim 4, wherein said first cell is formed in a solid electrolyte element, further comprising a resistance measuring circuit working to measure a resistance of the solid electrolyte element, and wherein said applying voltage correcting circuit corrects the target voltage as a function of the resistance measured by said resistance measuring circuit.
7. A gas concentration measuring apparatus as set forth in claim 1, wherein said second cell outputs a current as a function of the concentration of the specified oxygen containing gas component, further comprising a second cell output correcting circuit working to correct the current outputted from said second cell based on the output of said monitor cell.
8. A gas concentration measuring apparatus as set forth in claim 1, further comprising a change rate determining circuit working to determine a variable rate at which the target voltage applied to said first cell is to be changed.
9. A gas concentration measuring apparatus as set forth in claim 8, wherein said change rate determining circuit increases the variable rate as a difference between an actual voltage applied to said first cell

and the target voltage to be applied to said first cell increases.

10. A gas concentration measuring apparatus as set forth in claim 8, wherein said change rate determining circuit determines the variable rate by setting a cycle in which the target voltage is changed. 5
11. A gas concentration measuring apparatus as set forth in claim 10, said change rate determining circuit increases the cycle as a difference between an actual voltage applied to said first cell and the target voltage to be applied to said first cell is decreased. 10
12. A gas concentration measuring apparatus as set forth in claim 1, wherein a current measuring range is defined in which the electric current produced by said first cell is to be measured, and wherein the voltage-to-current relation is defined by a target applying voltage line representing the target applying voltage to be applied to said first cell in terms of the electric current produced by said first cell, the target applying voltage line including a segment which changes with a change in electric current produced by said first cell at a first inclination substantially depending upon a resistance of said first cell within the current measuring range, and wherein within an outside range defined outside the current measuring range, the target applying voltage line including a segment which changes at a second inclination reverse in sign to the first inclination. 15 20 25 30
13. A gas concentration measuring apparatus as set forth in claim 1, wherein a higher voltage is applied to said first cell for a period of time following energization of said gas concentration sensor. 35
14. A gas concentration measuring apparatus as set forth in claim 13, wherein when the output of said monitor cell falls out of a specified range immediately after said gas concentration is energized, said applying voltage controlling circuit applies the higher voltage to said first cell. 40
15. A gas concentration measuring apparatus comprising: 45
 - a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to determine a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell

working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof;

an applying voltage correcting circuit working to determine a target voltage to be applied to said first cell by looking up a predetermined voltage-to-current relation as a function of the electric current produced by said first cell, said applying voltage correcting circuit correcting one of the target voltage and the predetermined voltage-to-current relation as a function of the output of said monitor cell; and

an applying voltage controlling circuit working to control voltage applied to said first cell into agreement with the target voltage determined by said applying voltage correcting circuit.

16. A gas concentration measuring apparatus as set forth in claim 15, wherein the voltage-to-current relation is defined in a map by a target applying voltage line which represents the target applying voltage to be applied to said first cell in terms of the electric current produced by said first cell, and wherein said applying voltage correcting circuit corrects the voltage-to-current relation by changing an inclination of the target applying voltage line defined in the map as a function of the output of said monitor cell.
17. A gas concentration measuring apparatus as set forth in claim 15, wherein the voltage-to-current relation is defined in a map by a target applying voltage line which represents the target applying voltage to be applied to said first cell in terms of the electric current produced by said first cell, and wherein said applying voltage correcting circuit corrects the voltage-to-current relation by changing an offset of the target applying voltage line in terms of the electric current produced by said first cell as a function of the output of said monitor cell.
18. A gas concentration measuring apparatus as set forth in claim 15, wherein said applying voltage correcting circuit corrects the target voltage to be applied to the first cell so as to bring the output of said monitor cell into agreement with a target value required for keeping the concentration of oxygen molecules at a given level within the gas chamber.
19. A gas concentration measuring apparatus as set forth in claim 15, wherein correction of the target voltage to be applied to said first cell is performed in a cycle longer than that in which the voltage applied to said first cell is controlled by said applying voltage controlling circuit. 50 55
20. A gas concentration measuring apparatus comprising:

a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to produce an electric current for determining a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof;

an applying voltage determining circuit looking up a predetermined voltage-to-current relation to determine a target voltage to be applied to said first cell as a function of the electric current produced by said first cell so as to preclude said first cell from decomposing the specified oxygen containing gas component; and
a second cell output correcting circuit working to correct the electric current outputted by said second cell as a function of the output of said monitor cell.

21. A gas concentration measuring apparatus as set forth in claim 20, wherein said second cell output correcting circuit subtracts a current value equivalent to the output of said monitor cell representing the concentration of residual oxygen molecules from the electric current produced by said second cell.
22. A gas concentration measuring apparatus as set forth in claim 21, wherein said second cell output correcting circuit corrects the electric current produced by said second cell and the output of said monitor cell as a function of a difference in catalysis between said second cell and said monitor cell, after which said second cell output correcting circuit subtracts the current value equivalent to the output of said monitor cell representing the concentration of residual oxygen molecules from the electric current produced by said second cell.
23. A gas concentration measuring apparatus as set forth in claim 20, wherein said second cell and said monitor cell are disposed adjacent to each other and exposed to a second chamber formed downstream of said first cell.
24. A gas concentration measuring apparatus comprising:

a gas concentration sensor including a gas chamber, a first cell responsive to application

of a voltage to pump therein oxygen molecules contained in gasses admitted into the gas chamber and discharge the pumped oxygen molecules to produce an electric current indicative of a concentration of the oxygen molecules, a second cell working to output an electric current for determining a concentration of a specified oxygen containing gas component contained in the gasses having passed through the first cell, and a monitor cell working to monitor a concentration of residual oxygen molecules within the gas chamber and provide an output indicative thereof;

an applying voltage determining circuit working to determine a target voltage to be applied to said first cell by looking up a predetermined voltage-to-current relation as a function of the electric current produced by said first cell;

a first correcting circuit working to correct one of the target voltage and the predetermined voltage-to-current relation as a function of the output of said monitor cell so as to preclude said first cell from decomposing the specified oxygen containing gas component;

an applying voltage controlling circuit working to control voltage applied to said first cell into agreement with the target voltage provided by said applying voltage correcting circuit; and
a second correcting circuit working to correct the electric current produced by said second cell as a function of the output of said monitor cell to determine the concentration of the specified oxygen containing gas component.

25. A gas concentration measuring apparatus as set forth in claim 24, wherein correction of the target voltage to be applied to said first cell is performed by said first correcting circuit in a cycle longer than that in which the voltage applied to said first cell is controlled by said applying voltage controlling circuit.
26. A gas concentration measuring apparatus as set forth in claim 24, wherein when the output of said monitor cell is brought into agreement with a target value or falls within a range around the target value under control of the target voltage applied to said first cell by said applying voltage controlling circuit, said second correcting circuit corrects the electric current produced by said second cell based on the output of said monitor cell.
27. A gas concentration measuring apparatus comprising:

a gas concentration sensor including a gas chamber, a first cell responsive to application of a voltage to pump therein oxygen mole-

cules contained in gasses admitted into the gas
 chamber and discharge the pumped oxygen
 molecules to produce an electric current indic-
 ative of a concentration of the oxygen mole-
 cules, a second cell working to determine a
 concentration of a specified oxygen containing
 gas component contained in the gasses having
 passed through the first cell, and a monitor cell
 working to monitor a concentration of residual
 oxygen molecules within the gas chamber and
 provide an output indicative thereof, said first
 cell being formed in a solid electrolyte element;
 a resistance determining circuit working to de-
 termine a resistance of the solid electrolyte el-
 ement;
 an applying voltage determining circuit working
 to determine a target voltage to be applied to
 said first cell by looking up a predetermined
 voltage-to-current relation as a function of the
 electric current produced by said first cell;
 an applying voltage correcting circuit correcting
 one of the target voltage and the predetermined
 voltage-to-current relation as a function of the
 resistance determined by said resistance de-
 termining circuit; and
 an applying voltage controlling circuit working
 to control voltage applied to said first cell into
 agreement with the target voltage provided by
 said applying voltage correcting circuit.

28. A gas concentration measuring apparatus as set
 forth in claim 27, wherein the voltage-to-current re-
 lation is defined in a map by a target applying volt-
 age line which represents the target applying volt-
 age to be applied to said first cell in terms of the
 electric current produced by said first cell, and
 wherein said applying voltage correcting circuit cor-
 rects the voltage-to-current relation by changing an
 inclination of the target applying voltage line defined
 in the map as a function of the resistance of said
 first cell.
29. A gas concentration measuring apparatus as set
 forth in claim 27, wherein the voltage-to-current re-
 lation is defined in a map by a target applying volt-
 age line which represents the target applying volt-
 age to be applied to said first cell in terms of the
 electric current produced by said first cell, and
 wherein said applying voltage correcting circuit cor-
 rects the voltage-to-current relation by changing an
 offset of the target applying voltage line in terms of
 the electric current produced by said first cell as a
 function of the resistance of said first cell.

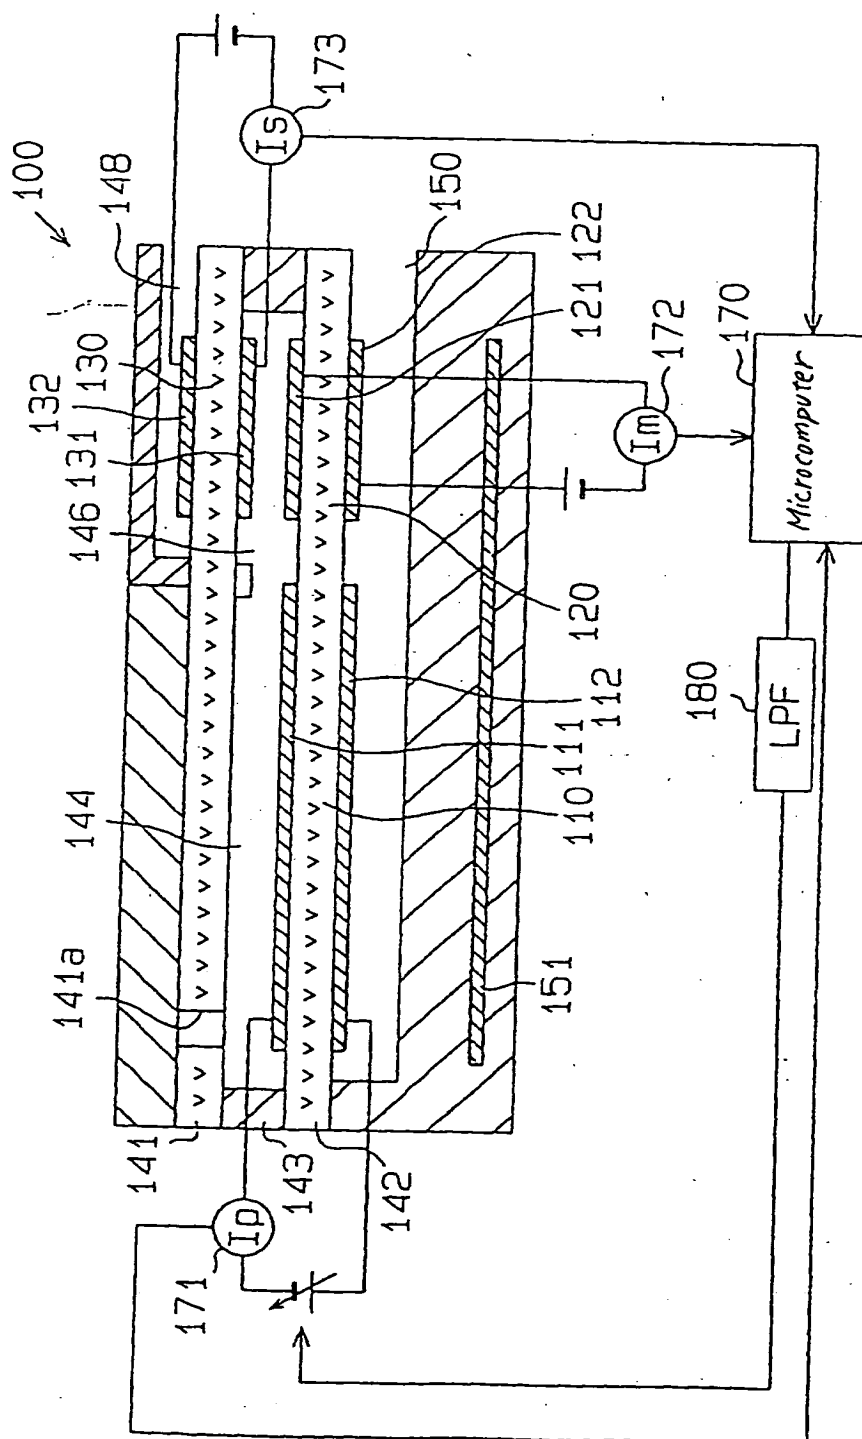


FIG. 1

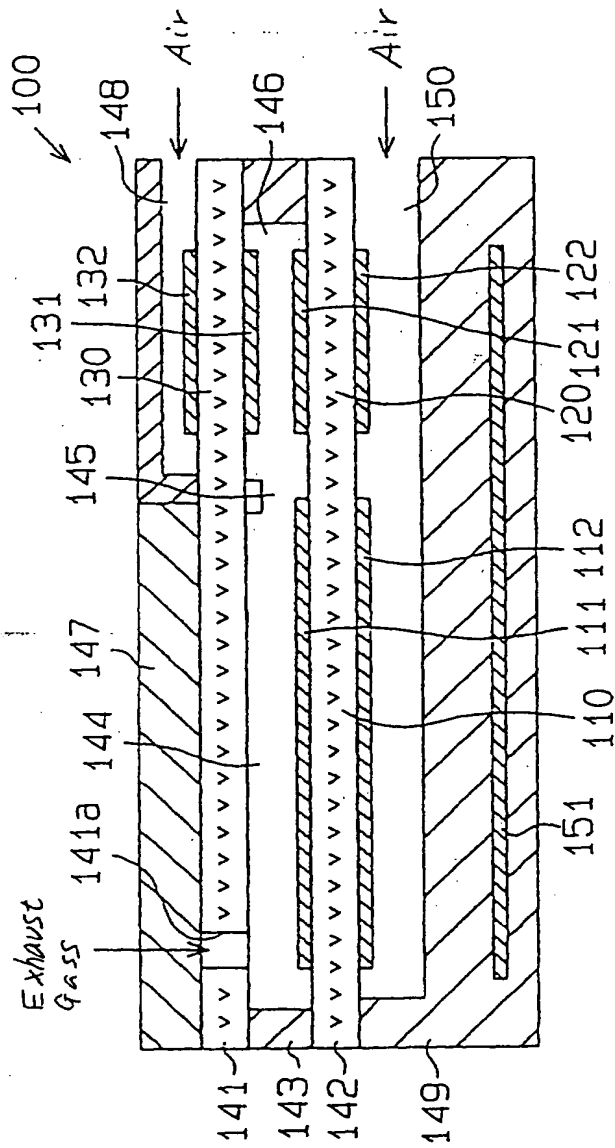


FIG. 2

FIG. 3(a)

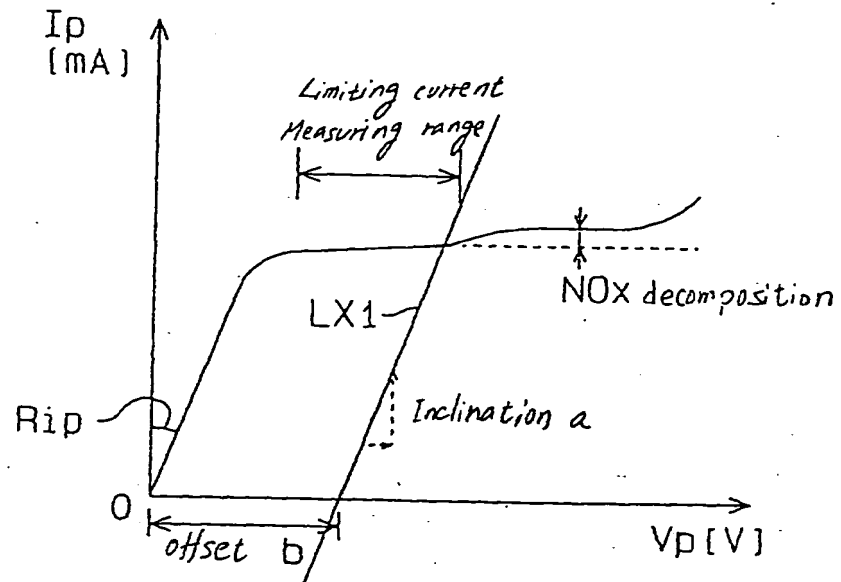


FIG. 3(b)

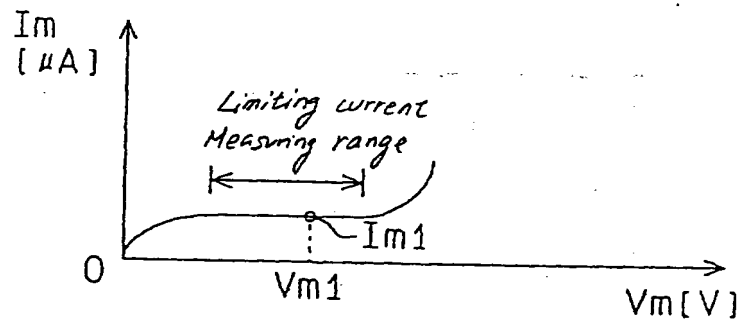
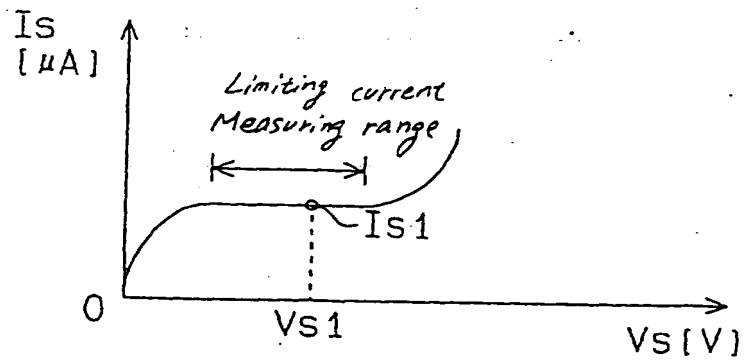


FIG. 3(c)



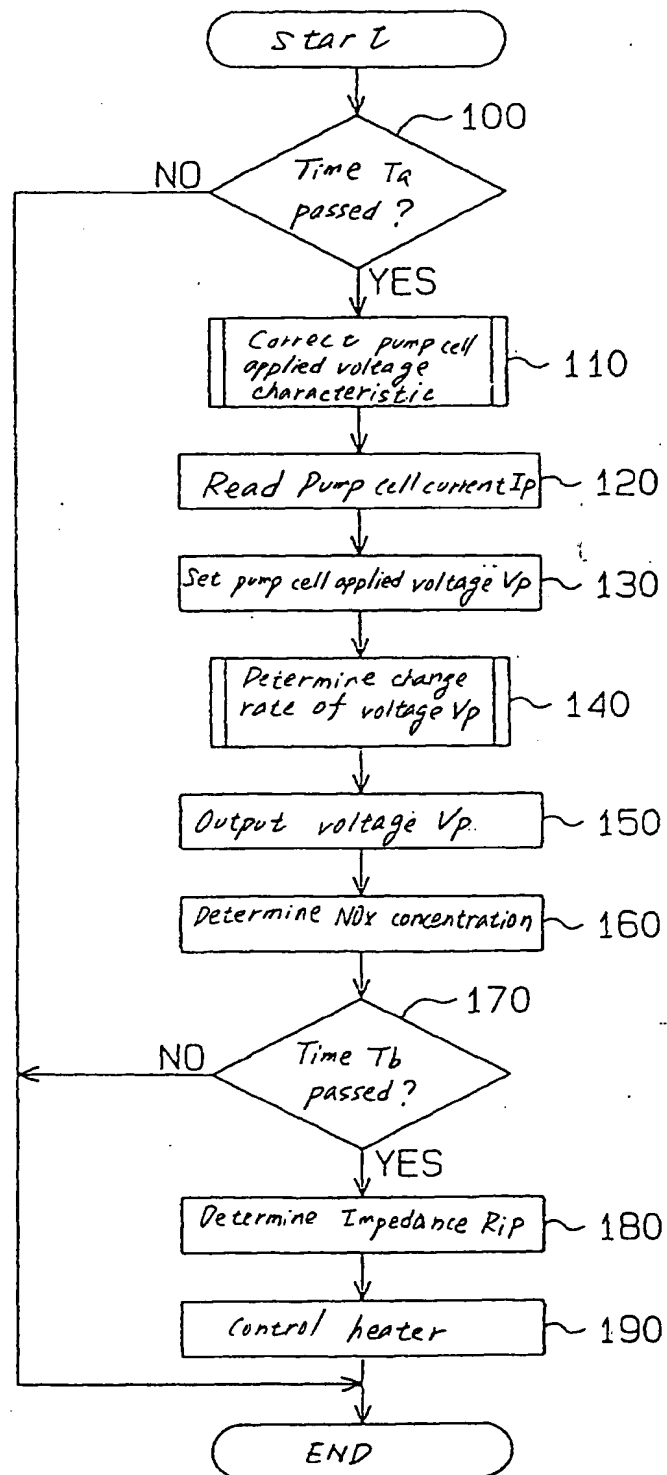


FIG. 6

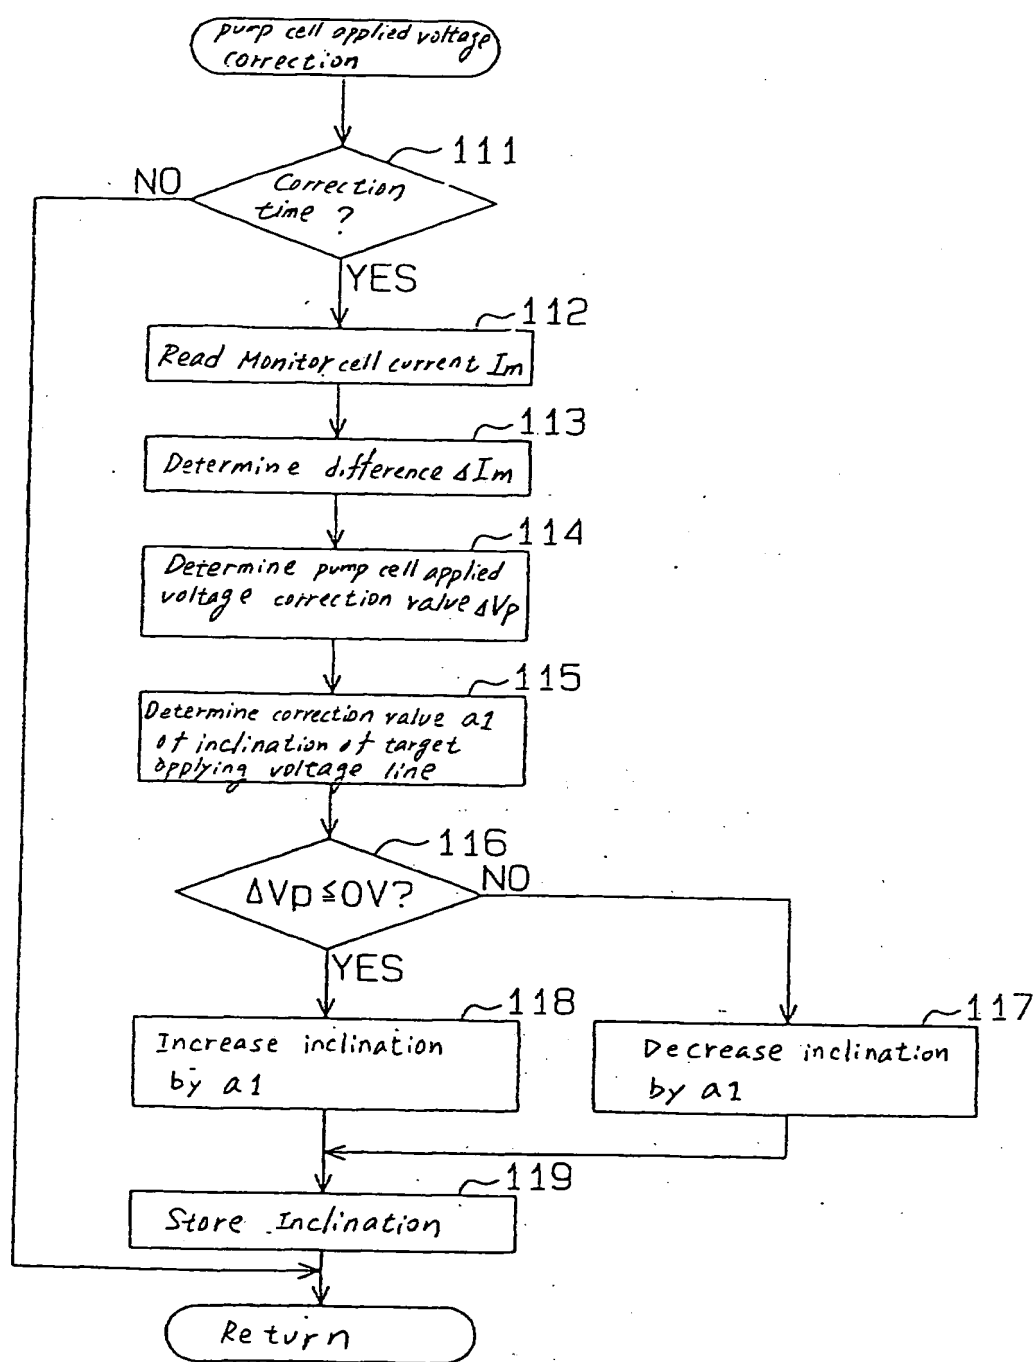


FIG. 7

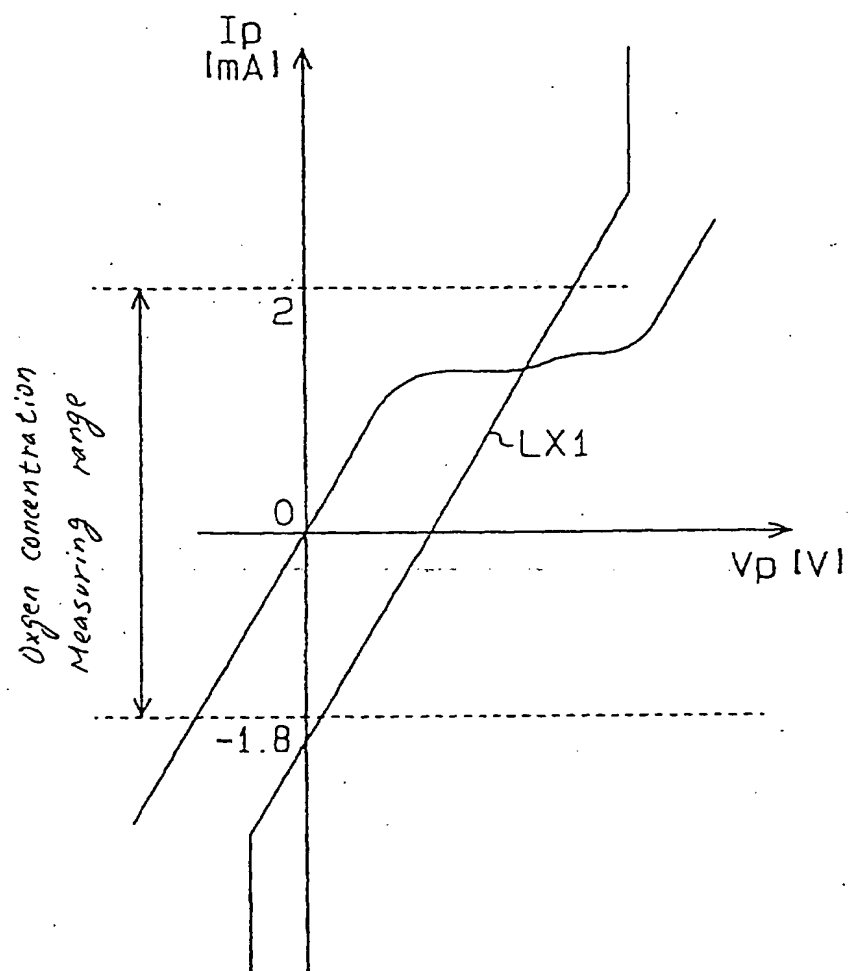


FIG.4

FIG. 5(a)

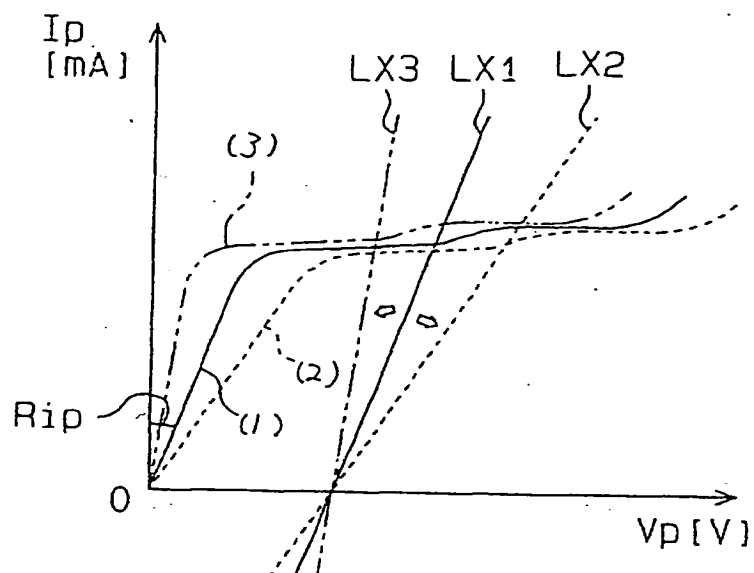


FIG. 5(b)

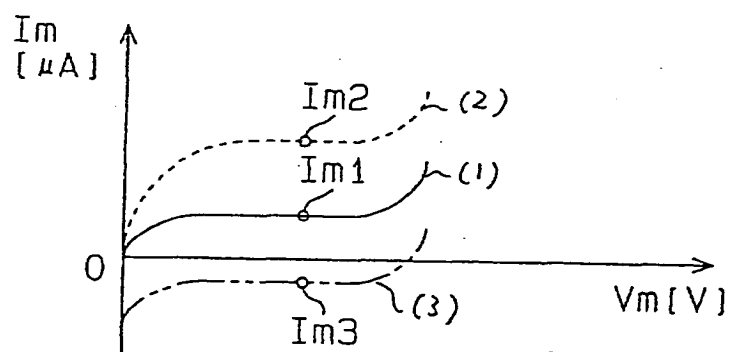
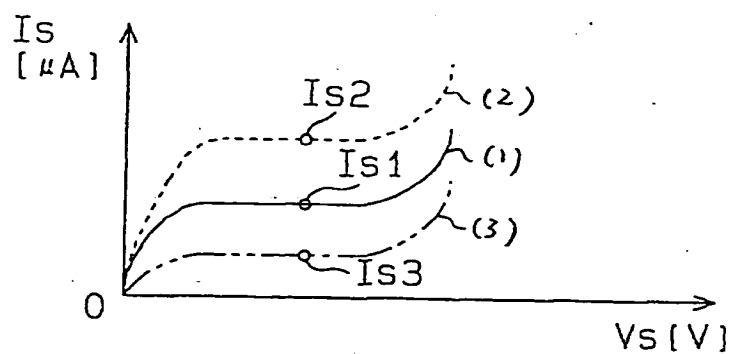


FIG. 5(c)



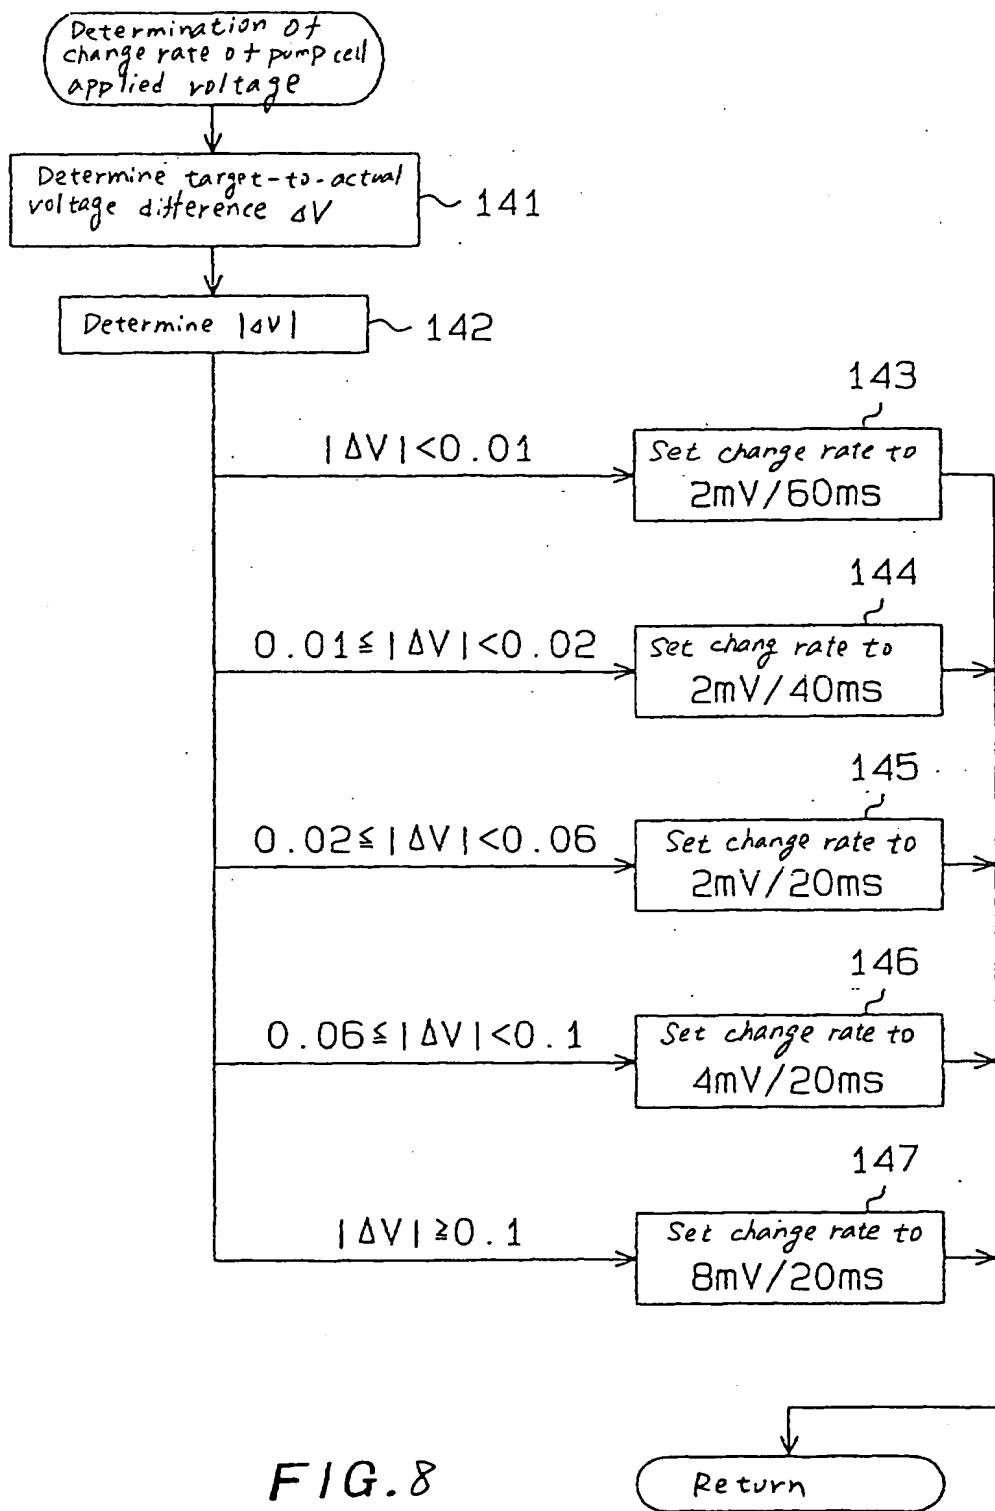


FIG. 8

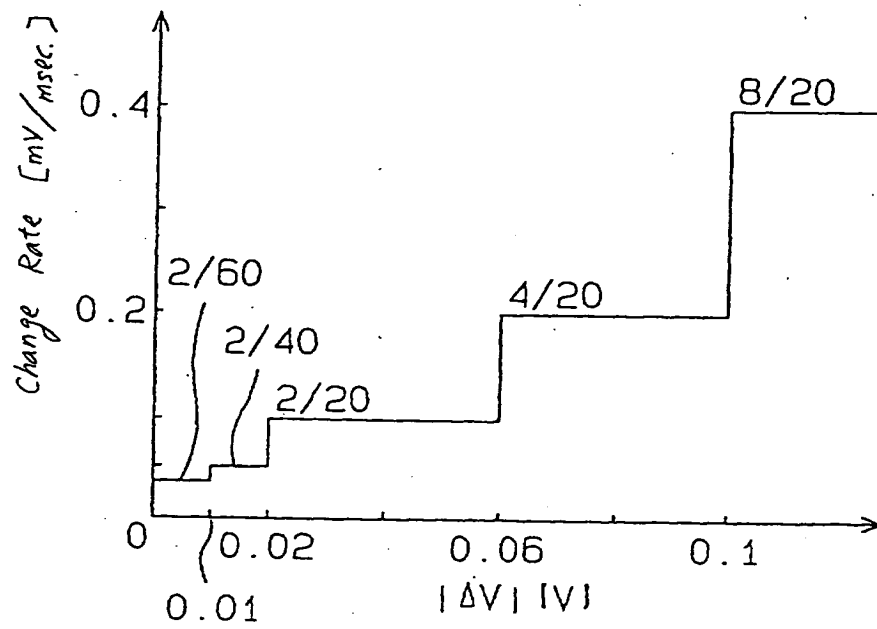


FIG. 9

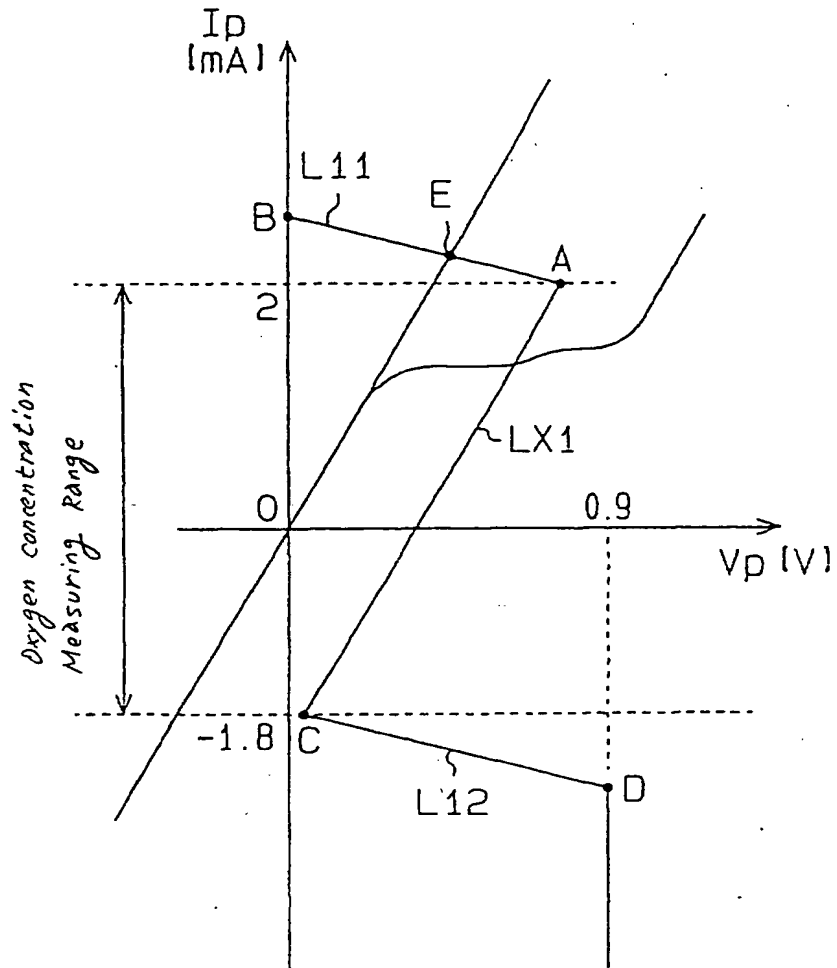


FIG. 10

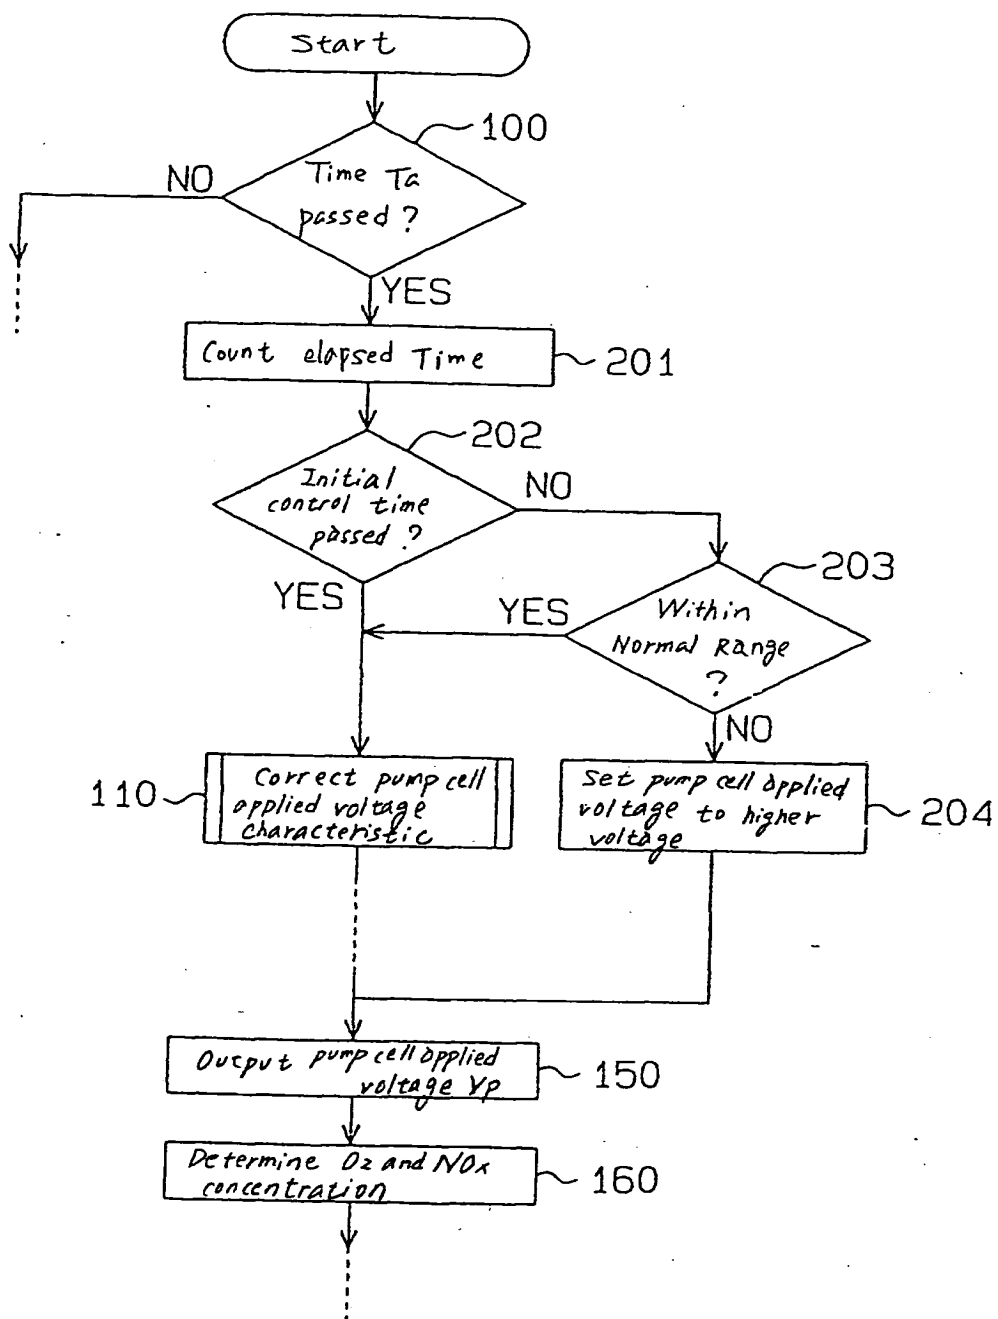


FIG. 11

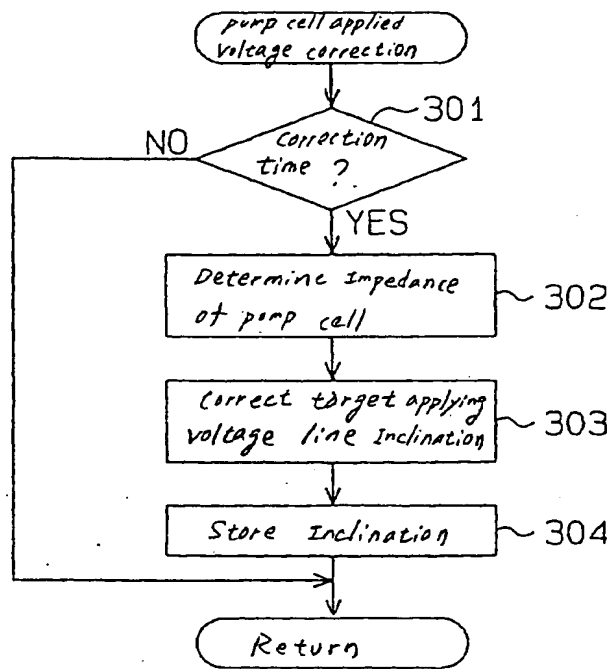


FIG.12

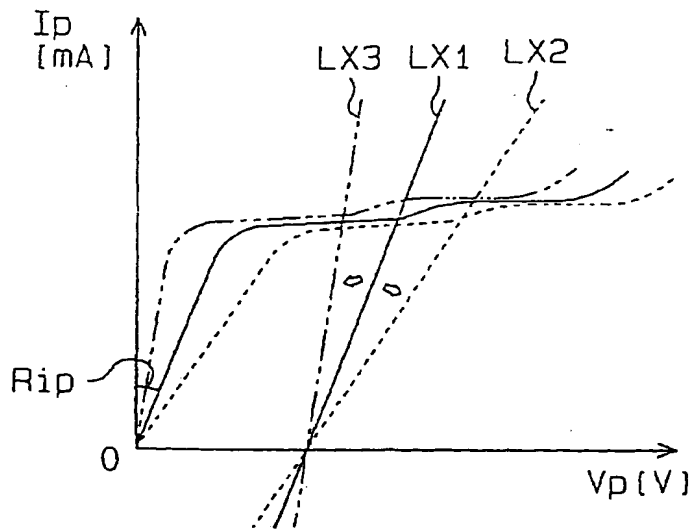


FIG.13

FIG. 14(a)

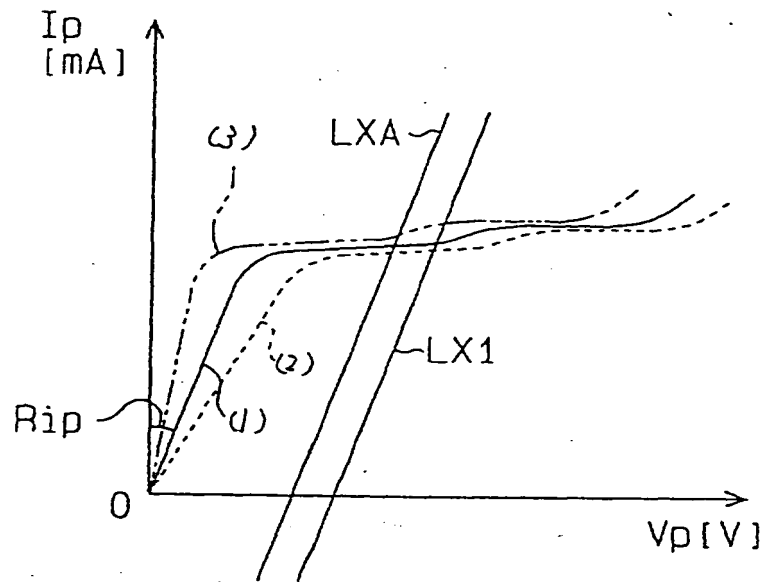


FIG. 14(b)

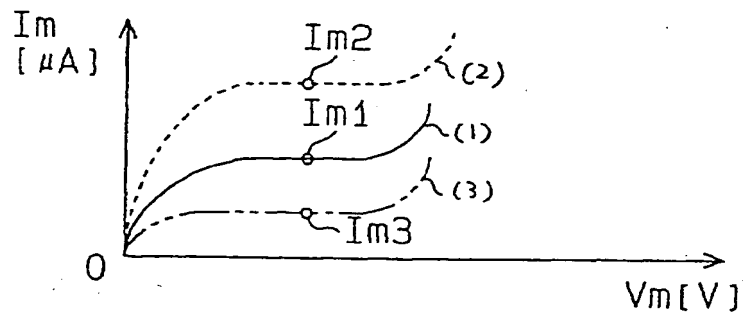
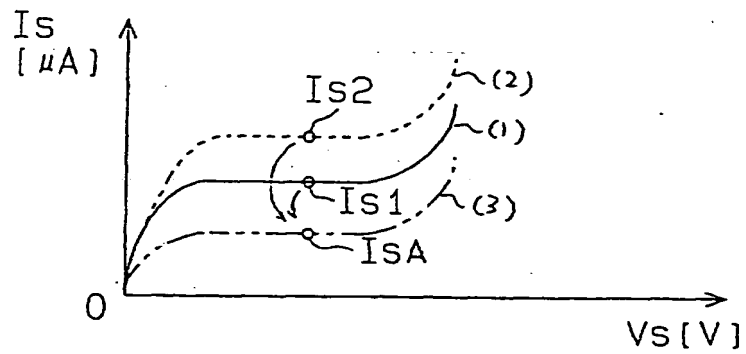


FIG. 14(c)



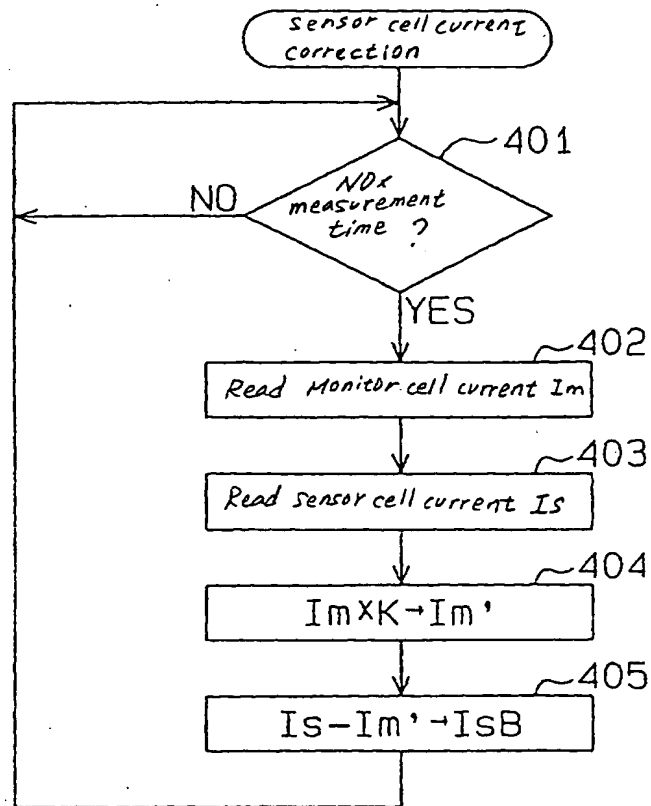


FIG. 15

FIG. 16(a)

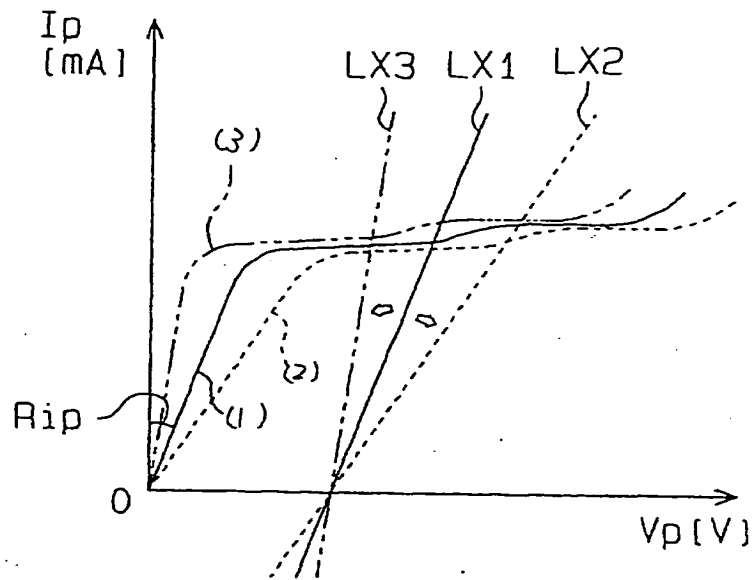


FIG. 16(b)

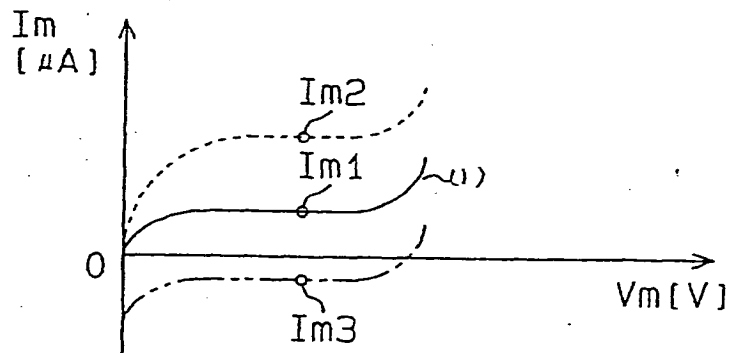
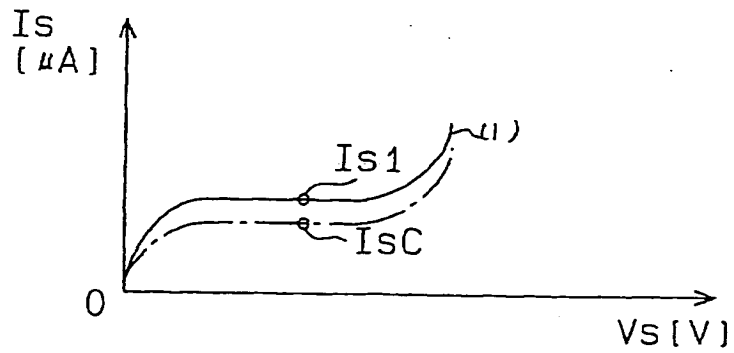


FIG. 16(c)



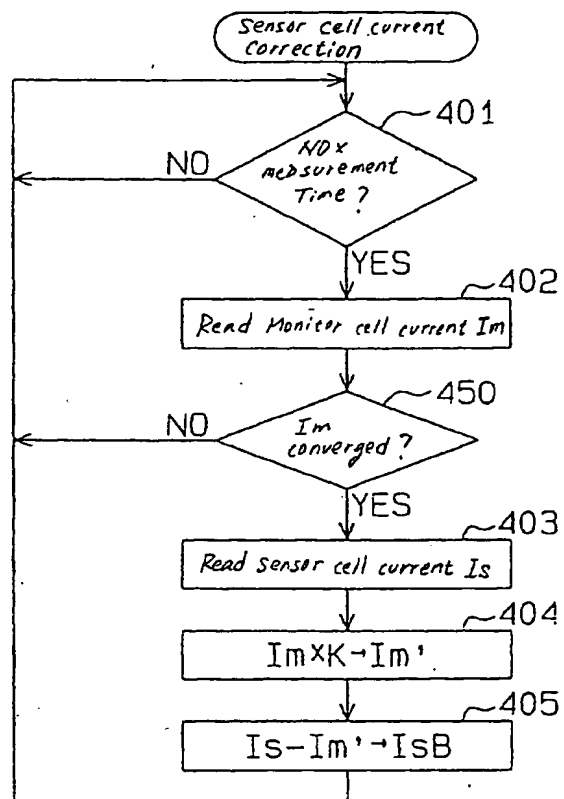


FIG. 17

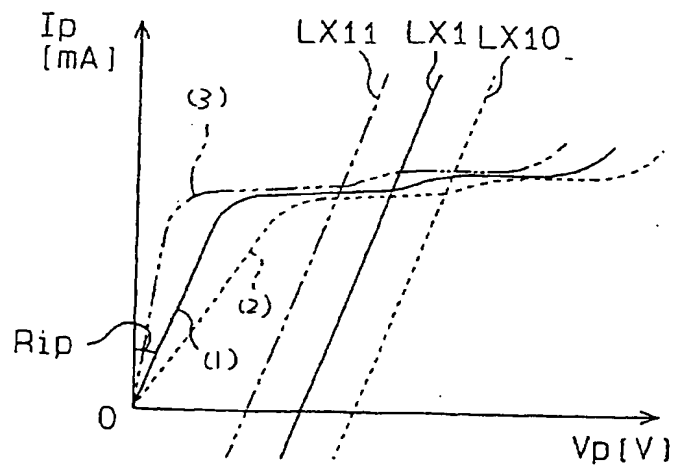


FIG. 18

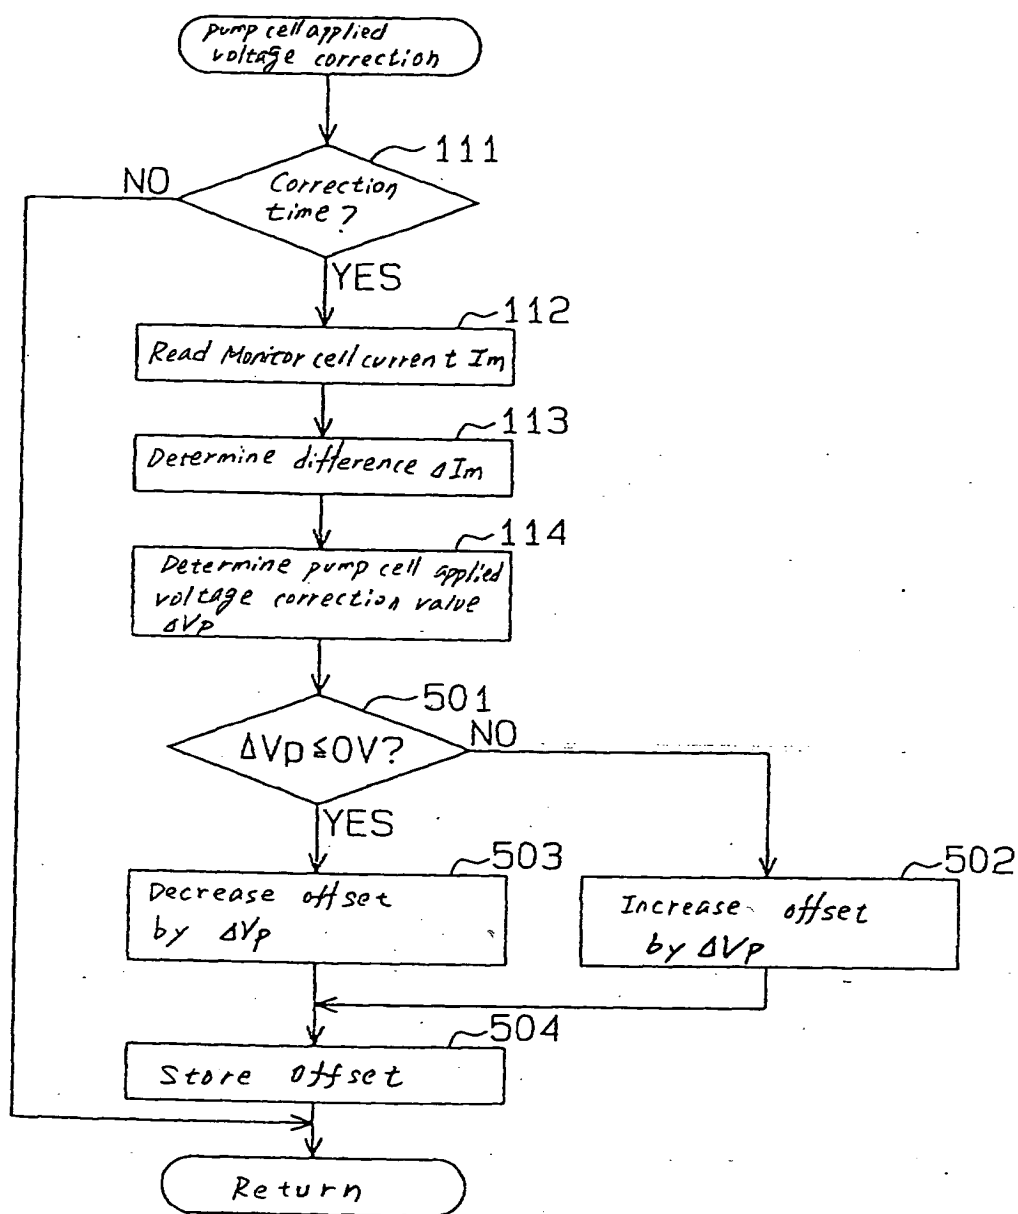


FIG. 19

FIG. 20

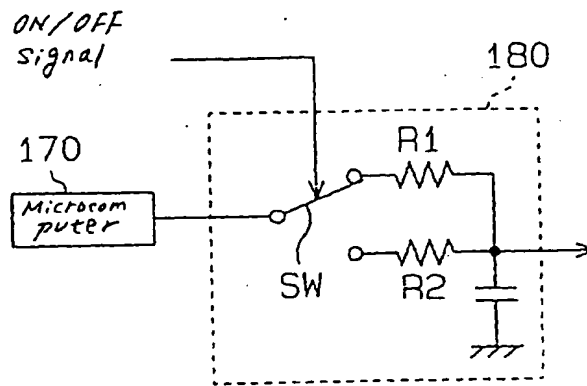


FIG. 23

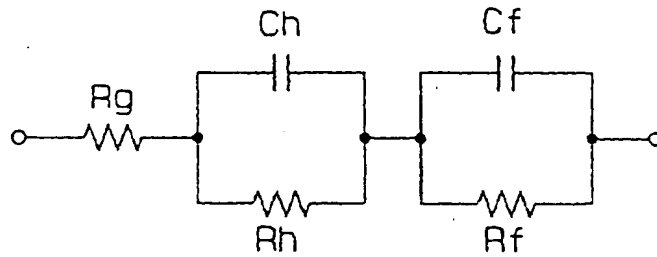
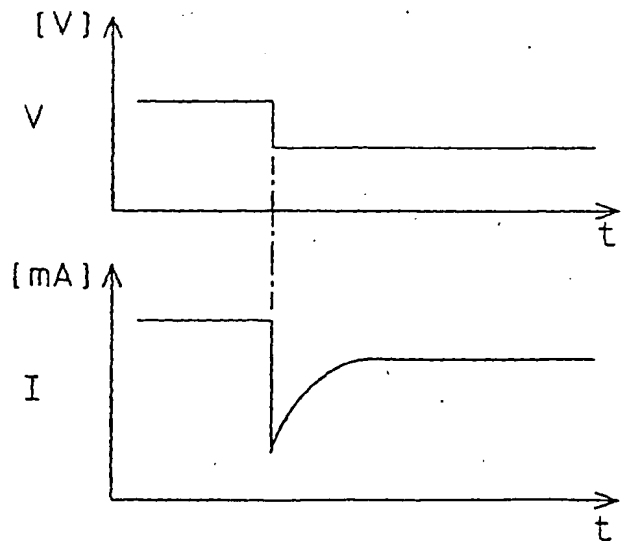


FIG. 24



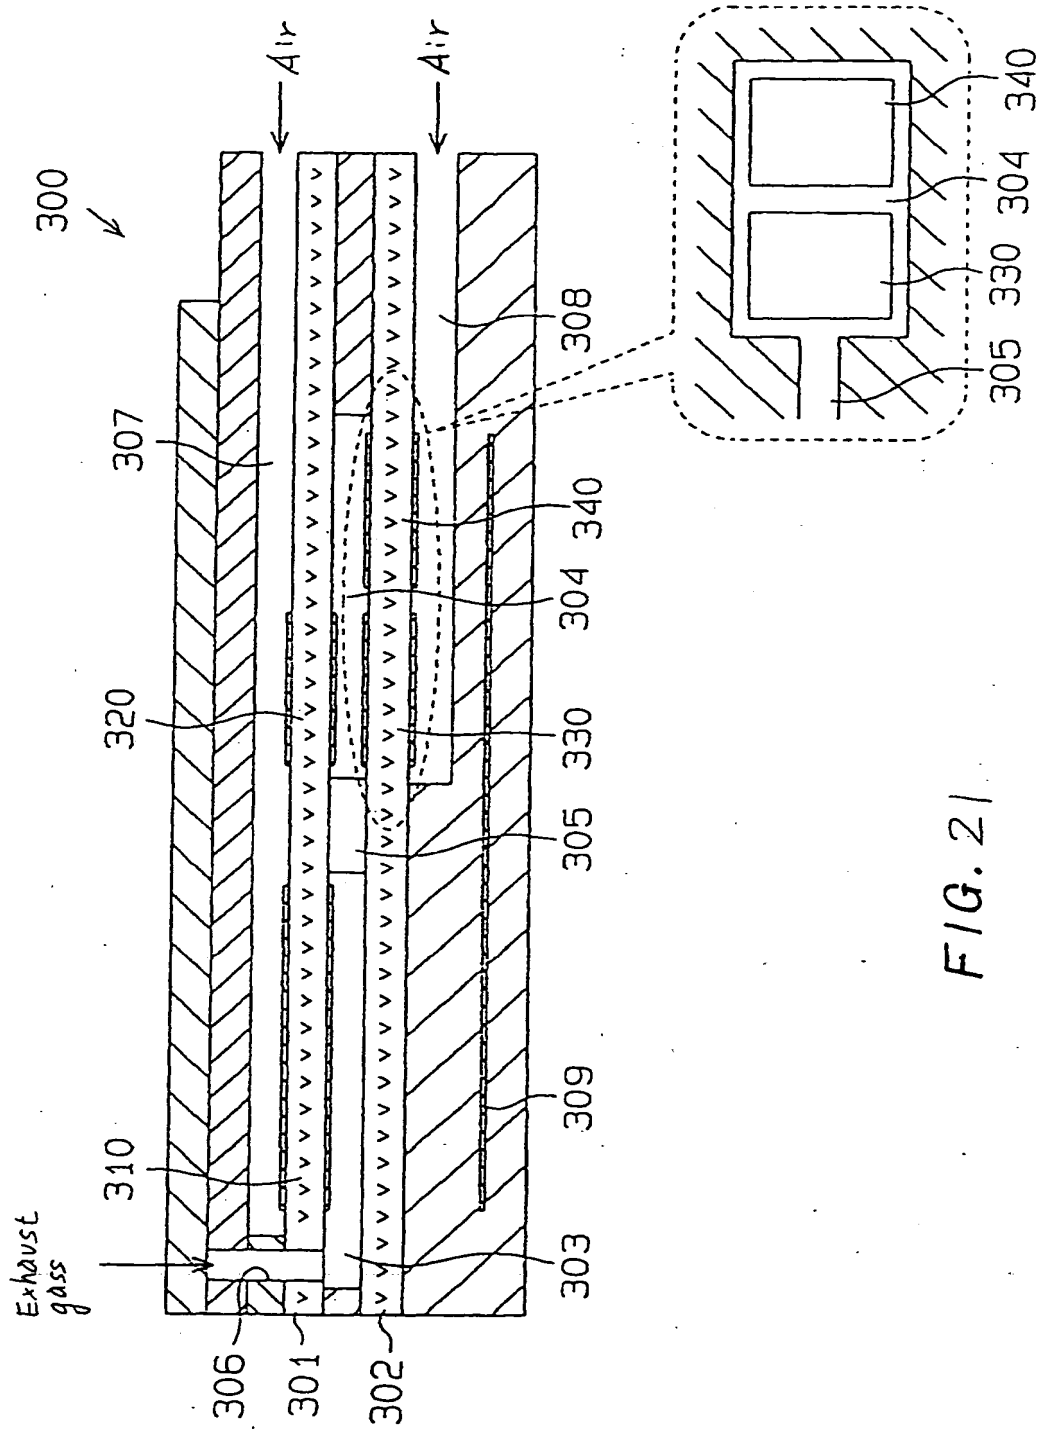


FIG. 21


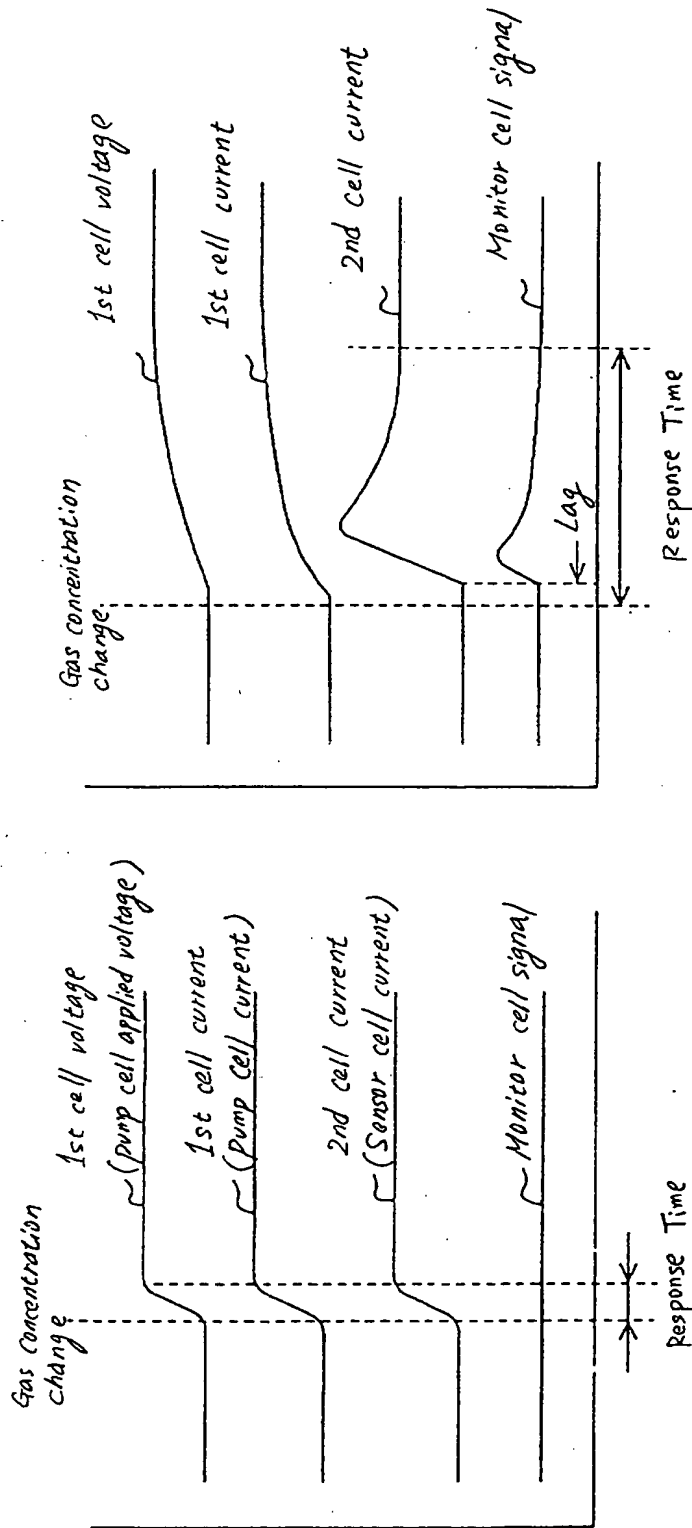


FIG. 22(b)
PRIOR ART

FIG. 22(a)

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 202 048 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.06.2004 Bulletin 2004/23

(51) Int Cl.7: G01N 27/419, G01N 33/00,
F02D 41/14

(43) Date of publication A2:
02.05.2002 Bulletin 2002/18

(21) Application number: 01125865.4

(22) Date of filing: 30.10.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR —
Designated Extension States:
AL LT LV MK RO SI

- Hada, Satoshi
Kariya-city, Aichi-pref. 448-0029 (JP)
- Suzuki, Toshiyuki
Kariya-city, Aichi-pref. 448-0029 (JP)
- Niwa, Mitsunobu
Kariya-city, Aichi-pref. 448-0029 (JP)

(30) Priority: 31.10.2000 JP 200033319
05.07.2001 JP 2001204728

(71) Applicant: Denso Corporation
Kariya-city, Aichi-pref., 448-0029 (JP)

(74) Representative: Böckelen, Rainer
Tiedtke-Bühling-Kinne & Partner (GbR),
TBK-Patent
Bavariaring 4
80336 München (DE)

(72) Inventors:
• Kurokawa, Eiichi
Kariya-city, Aichi-pref. 448-0029 (JP)

(54) Gas concentration measuring apparatus compensating for error component of output signal

(57) A gas concentration measuring apparatus is provided which includes a gas concentration sensor consisting of a pump cell, a sensor cell, and a monitor cell. The pump cell works to determine the concentration of O₂. The sensor cell works to decompose an oxygen containing gas such as NO_x and provide an output indicative of the concentration of NO_x. The apparatus also

includes an applying voltage determining circuit which looks up a predetermined voltage-to-current relation to determine a target voltage to be applied to the pump cell as a function of the current produced by the pump cell so as to preclude the pump cell from decomposing the oxygen containing gas component, thereby minimizing an error in determining the concentration of oxygen containing gas as a function of the output of the sensor cell.

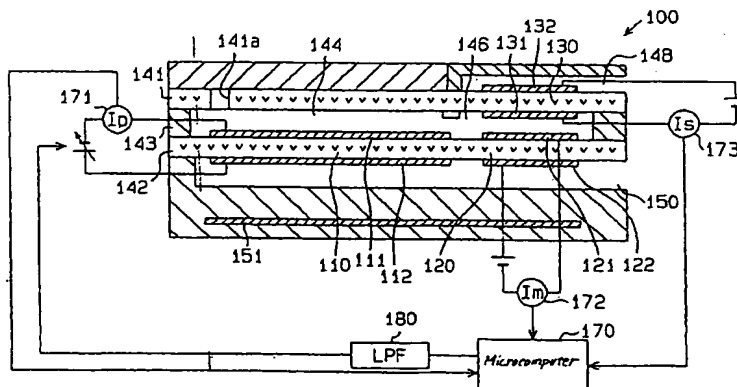


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 5865

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,X	EP 0 987 546 A (DENSO CORP) 22 March 2000 (2000-03-22)	1-3	G01N27/419 G01N33/00 F02D41/14
Y	* paragraphs [0019] - [0023], [0025] - [0030], [0034] - [0036], [0040] - [0068], [0143] - [0152] *	7,20-23, 27-29	
A	* figures 5,6,8,9,11,15,29 *	15,24	
D,A	KATO N ET AL: "PERFORMANCE OF THICK FILM NOX SENSOR ON DIESEL AND GASOLINE ENGINES" SAE TRANSACTIONS, JOURNAL OF ENGINES, WARRENDALE, PA, US, 1997, pages 1246-1253, XP000866024 * page 1246 - page 1247; figure 1 * * page 1249, left-hand column *	1,2,5,6, 15,18, 20,23, 24,27	
A	EP 0 851 108 A (DENSO CORP) 1 July 1998 (1998-07-01) * abstract * * column 5, lines 18-36 * * column 7, lines 3-8 * * column 10, line 8 - column 13, line 11 * * column 15, lines 19-23 * * column 16, lines 29-32 * * column 16, line 56 - column 19, line 27 * * figures 1-3,6-12 *	1,3,8-12	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G01N F02D
Y	EP 0 999 442 A (DENSO CORP) 10 May 2000 (2000-05-10)	7,20-23	
A	* paragraphs [0010], [0031] - [0049], [0132] - [0145] * * figures 1,2,5,6,9,10,31,32 *	1-3,15, 18,24,27	
-/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 April 2004	Examiner Meyer, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (9/94C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 5865

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 841 562 A (NGK SPARK PLUG CO) 13 May 1998 (1998-05-13) * abstract *	7,20-22	
A	* column 16, line 17 - column 20, line 54 * column 22, lines 43-57; figures 1,3,10 *	1,2,4-6, 15,18, 24,27	
Y	EP 0 878 709 A (NGK SPARK PLUG CO) 18 November 1998 (1998-11-18) * abstract; figure 1 *	7,20-22	
Y	WO 00/57167 A (HITACHI LTD ;SUZUKI SEIKOU (JP); KOMACHIYA MASAHIRO (JP)) 28 September 2000 (2000-09-28) * page 16, line 16 - page 17, line 18 * * figures 10,11 *	7,20-22	
Y	& EP 1 174 712 A (HITACHI LTD) 23 January 2002 (2002-01-23) * paragraph [0040]; figures 10,11 *	7,20-22	
A	EP 0 831 322 A (NGK INSULATORS LTD) 25 March 1998 (1998-03-25) * abstract * * page 1, columns 44-52 *	20-23	
A	US 4 770 760 A (KATO NOBUHIDE ET AL) 13 September 1988 (1988-09-13) * abstract; figure 1 *	20-23	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 0 903 575 A (RIKEN KK) 24 March 1999 (1999-03-24) * abstract; figure 1 *	20-23	
-/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 April 2004	Examiner Meyer, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone. Y : particularly relevant if combined with another document of the same category. A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date. D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 5865

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y A	EP 0 995 986 A (DENSO CORP) 26 April 2000 (2000-04-26) * paragraphs [0103] - [0116], [0142] * * figures 21,22 * -----	27-29 1,15,20, 24	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 April 2004	Examiner Meyer, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

Application Number
EP 01 12 5865

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 01 12 5865

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-14

2. claims: 15-19,24-26

3. claims: 20-26

4. claims: 27-29

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 5865

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-04-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0987546	A	22-03-2000	JP 2000155109 A	06-06-2000
			EP 0987546 A2	22-03-2000
			US 6383354 B1	07-05-2002
EP 0851108	A	01-07-1998	JP 10185861 A	14-07-1998
			EP 0851108 A2	01-07-1998
			US 5993641 A	30-11-1999
EP 0999442	A	10-05-2000	JP 2000137018 A	16-05-2000
			EP 0999442 A2	10-05-2000
			US 6295862 B1	02-10-2001
			US 2001039825 A1	15-11-2001
EP 0841562	A	13-05-1998	JP 3332761 B2	07-10-2002
			JP 10142194 A	29-05-1998
			EP 1324028 A1	02-07-2003
			EP 0841562 A2	13-05-1998
			US 6214207 B1	10-04-2001
EP 0878709	A	18-11-1998	JP 3372186 B2	27-01-2003
			JP 10267885 A	09-10-1998
			EP 1074833 A1	07-02-2001
			EP 1074834 A1	07-02-2001
			EP 1077375 A1	21-02-2001
			EP 0878709 A2	18-11-1998
			US 2002017467 A1	14-02-2002
			US 2003042151 A1	06-03-2003
			US 2002130053 A1	19-09-2002
			JP 11023528 A	29-01-1999
			JP 3501956 B2	02-03-2004
			JP 11108887 A	23-04-1999
			JP 11148910 A	02-06-1999
WO 0057167	A	28-09-2000	WO 0057167 A1	28-09-2000
			EP 1174712 A1	23-01-2002
			US 6592732 B1	15-07-2003
EP 1174712	A	23-01-2002	WO 0057167 A1	28-09-2000
			EP 1174712 A1	23-01-2002
			US 6592732 B1	15-07-2003
EP 0831322	A	25-03-1998	JP 10090222 A	10-04-1998
			DE 69713698 D1	08-08-2002
			DE 69713698 T2	13-02-2003
			EP 0831322 A2	25-03-1998
			US 6045673 A	04-04-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 5865

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-04-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4770760	A	13-09-1988	JP 1944307 C	23-06-1995
			JP 6072861 B	14-09-1994
			JP 63038154 A	18-02-1988
			DE 3782584 D1	17-12-1992
			DE 3782584 T2	06-05-1993
			EP 0257842 A2	02-03-1988
EP 0903575	A	24-03-1999	CA 2214571 A1	03-03-1999
			CN 1212369 A	31-03-1999
			JP 3128114 B2	29-01-2001
			JP 9274011 A	21-10-1997
			US 5861092 A	19-01-1999
			EP 0903575 A1	24-03-1999
EP 0995986	A	26-04-2000	JP 2000171439 A	23-06-2000
			EP 0995986 A2	26-04-2000
			US 6453724 B1	24-09-2002

EPO FORM P0659

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)